

Double Ports Gigabite PoE++ Injector



GNT-53011

Output power consumption up to 60W
 100m Transmission
 2 RJ45


Product Features

Double PoE Input/Output
 No fan, no noise, dustproof
 5KV Lightning & 8KV ESD Protection

Specifications

| | |
|-------------------------|---|
| Interface | Input Voltage: 100-240V AC @50/60Hz |
| PoE | Data Input/ PoE output: 2 RJ45 PoE Power Output: DC 52V/60 watts max Power Pin Assignment: Pair1: 1/2(+)/3/6 (-) |
| Networking Standard | EEE 802.3i 10BASE-T/IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3x Flow Control IEEE 802.3af/at/bt Power over Ethernet |
| Ethernet Port | Transmission Rate: 10/100M /1000Mbps Distance: 100m(Max.) |
| Protection | Lightning Protection:5KV. Per: IEC61000-4-5 ESD Protection:8KV. Per: IEC61000-4-2 |
| Physical Specifications | Size(L*W*H): 112*45*32mm, Weight: 0.35KG |
| Protection | Lightning Protection:6KV, Per: IEC61000-4-5 ESD Protection:8KV, Per: IEC61000-4-2 |
| Physical Specifications | Size(L*W*H): 187mm*139mm*43mm, Weight: 1.0KG |
| Working Environment | Operating Temperature: -30°C~55°C Storage Temperature: -40°C~85°C Humidity: 0%~95% Non-condensing |
| Color | Black |
| Warranty | Whole Device: 1 year |

PoE Injector connection diagram

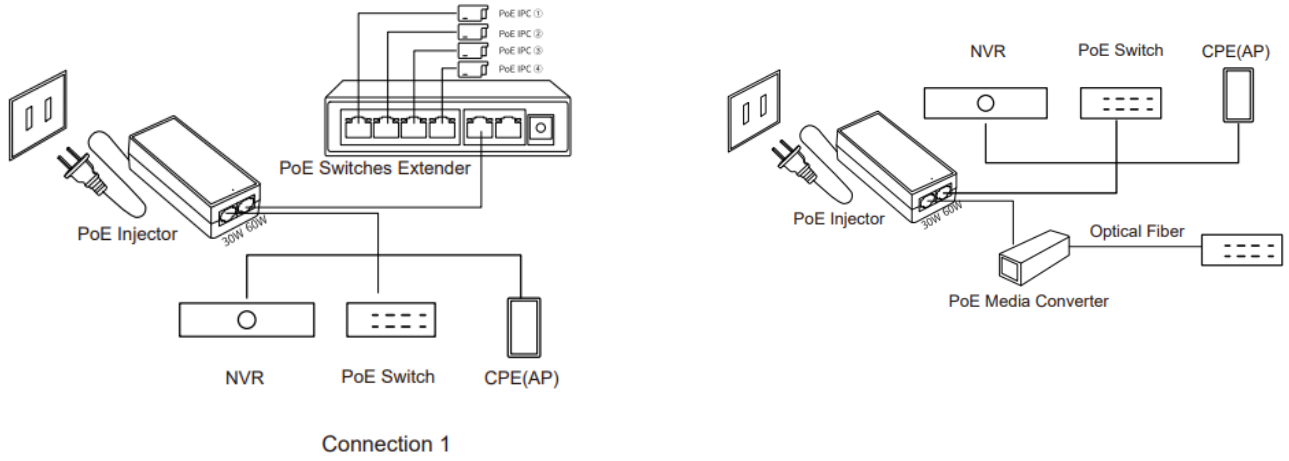

Dimension (mm)

