

Mechanical

Dimensions	98 x 98 x 30 mm (3.9 x 3.9 x 1.2")
Weight	320 g (11.3 oz)
Enclosure material	Polycarbonate

Hardware


Processor	Dual-core ARM® Cortex®-A53 at 1 GHz
Memory information	1 GB DDR3L
Management interface	EthernetBluetooth 5.1
Networking interface	LAN:(1) GbE RJ45 portWAN:(1) GbE RJ45 port
IDS/IPS throughput	1 Gbps**Measured with iPerf3 on DHCP WAN. Performance may be reduced with PPPoE depending on ISP implementation.
Power method	USB type C (5V/3A)
Supported voltage range	100–240V
Max. power consumption	3.83W
Ambient operating temperature	-10 to 40° C (14 to 104° F)
Ambient operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC

Gateway Features

Performance	WiFi QoS with UniFi APs Application, domain, and country-based QoS Application and device type identification Internet quality and outage reporting
Next-generation security	Application-aware firewall rules Signature-based IPS/IDS threat detection Content, country, domain, and ad filtering VLAN/subnet-based traffic segmentation Full stateful firewall
Advanced networking	License-free SD-WAN* WireGuard, L2TP and OpenVPN server OpenVPN client OpenVPN and IPsec site-to-site VPN One-click Teleport* and Identity Enterprise VPN** Policy-based WAN and VPN routing DHCP relay Customizable DHCP server IPv6 ISP support* *When paired with a CloudKey or Official UniFi Hosting. **When paired with a CloudKey.

Application Requirements

UniFi Network Version 8.0.7 and later

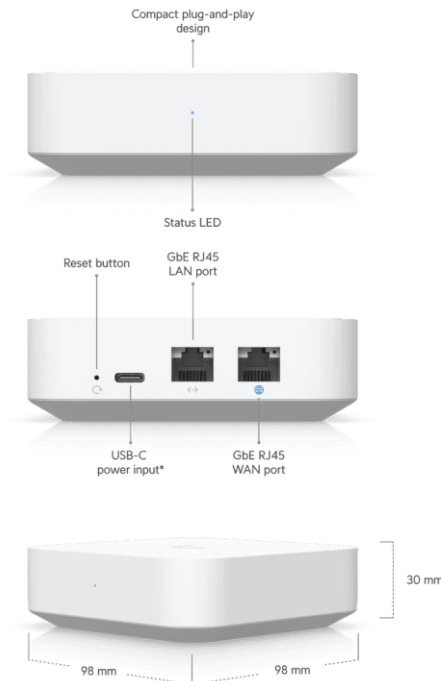

*5V DC, 3A USB-C adapter included.