

## DS-D4248RI-CQFL P4.8 Rental LED



### Cost-effective Rental Product


- High precision cast aluminum cabinet, ultra-thin and light weight,  $500 \times 1000 \leq 13$  Kg/cabinet, with a thickness of only 85.5 mm;
- $500 \times 500/500 \times 1000$  mm cabinets can be mixed and assembled to create a variety of shapes;
- Both the  $500 \times 500$  mm and  $500 \times 1000$  mm cabinets use a minimalist mini control box of the same model and can be shared, saving installation and calibrating time;
- Optional curved lock, capable of splicing large screens with  $\pm 10-15^\circ$  inner arc, outer arc,  $90^\circ$  corner, etc;
- The modular button lock design allows for fast assembly, disassembly and maintenance within 5 seconds;
- Work in silence: no fan, noise  $\leq 40$  dB; Not affecting the on-site audio-visual effect;
- Background large screen optimization plan; High refresh, SLR, camera 1/3000s shutter capture, no flicker, no ghost scanning line;
- Indoor and outdoor universal pixel pitches with P1.9/2.6/2.9/3.9/4.8 etc; Specialized in providing overall LED display solutions for events such as conferences, stage, product launches, and real estate.

## ▪ Specification

| Model                  |                          | DS-D4248RI-CQFL                                     |
|------------------------|--------------------------|---|
| Cabinet                | Pixel Configuration      | SMD Triad LED                                       |
|                        | Pixel Pitch Category     | P4.81   |
|                        | Pixel Pitch              | 4.81 mm   |
|                        | Modules Component        | 2 × 4   |
|                        | Dimensions (W × H × D)   | 500 mm × 1000 mm × 85.5 mm (19.69" × 39.4" × 3.37") |
|                        | Resolution               | 104 × 208   |
|                        | Area                     | 0.25 m <sup>2</sup>                                 |
|                        | Weight                   | 13 Kg (28.66 lb)                                    |
|                        | Pixel Density            | 43264 dots/m <sup>2</sup>                           |
|                        | Lamp Board Housing       | with housing  |
|                        | Cabinet Material         | Die-cast aluminum                                   |
|                        | Maintenance Method       | Front/Back Maintenance                              |
|                        | Cabinet Flatness         | 0.2 mm  |
|                        | Protection Level         | IP40(F)/IP40(R)                                     |
| Display                | White Balance Brightness | 800 cd/m <sup>2</sup>                               |
|                        | Color Temperature        | 3000 K to 10000 K adjustable                        |
|                        | Viewing Angle            | Horizontal 120°, Vertical 120°                      |
|                        | Contrast Ratio           | ≥ 6000:1  |
|                        | Color Uniformity         | ≤ ± 0.003Cx, Cy                                     |
|                        | Brightness Uniformity    | ≥ 97%   |
| Processing Performance | Driving Method           | Constant current driving                            |
|                        | Frame Frequency          | 60 Hz   |
|                        | Refresh Rate             | 3840 Hz   |
|                        | Grey Level               | 14 bit  |
|                        | Display Color            | 4.39 Trillion                                       |
| Power                  | Power Supply             | 110~220 VAC ± 15%                                   |

|                            |                               |  |
|----------------------------|-------------------------------|--|
|                            | Max. Consumption              | ≤ 500 W/m <sup>2</sup>                               |
|                            | Average Consumption           | ≤ 170 W/m <sup>2</sup>                               |
| <b>Working Environment</b> | Working Temperature           | -15~50 °C  |
|                            | Working Humidity              | 10% to 90% RH (non-condensing)                       |
|                            | Storage Humidity              | 10% to 90% RH (non-condensing)                       |
|                            | Storage Temperature           | -40~80 °C  |
| <b>General</b>             | Gross Weight                  | 115 Kg (253.53 lb)(8 pcs /Case)                      |
|                            | Package Dimension (W × H × D) | 1100 mm × 740 mm × 760 mm (43.31" × 29.13" × 29.92") |
|                            | Lifespan                      | Lamp 100,000 hours                                   |




▪ Typical Application

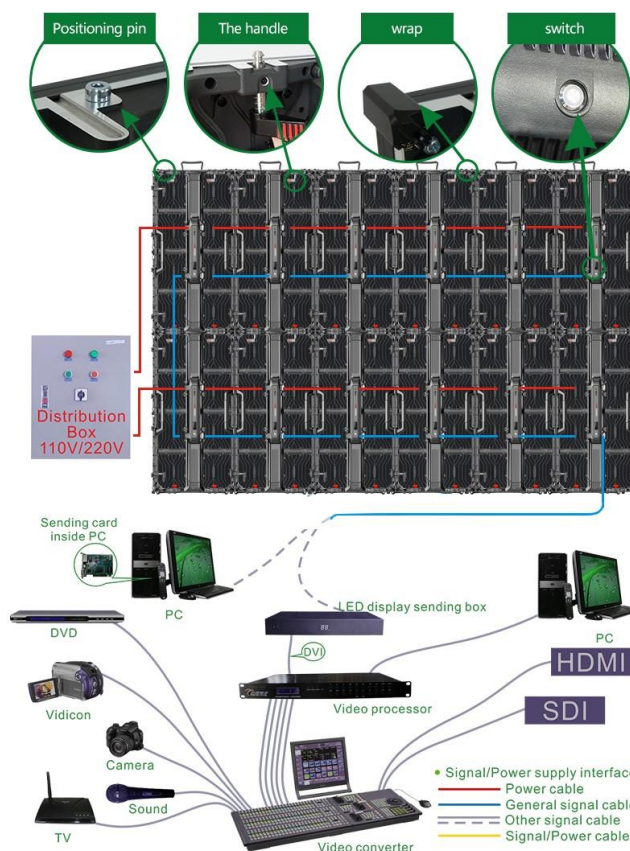

▪ Available Model

DS-D4248RI-CQFL

▪ Dimension

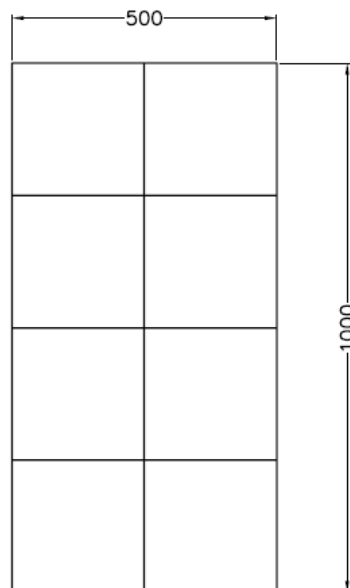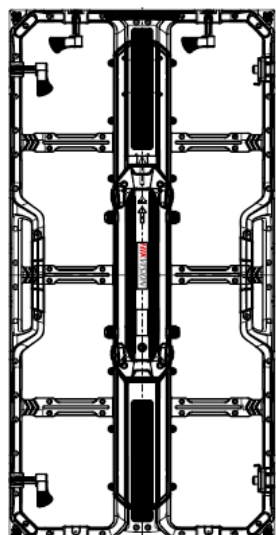

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

