

DS-3E0502P-E
POE Injector




- 1 x Gigabit PoE Ports, 1 x Gigabit Uplink Port
- 6 kV Surge Protection
- Desktop/Wall Installation

▪ Specification

General	
Net Weight	0.26 kg (0.55 lb)
Gross Weight	0.74 kg (1.63 lb)
Dimensions (W × H × D)	132.3 mm × 33.0 mm × 60.0 mm (3.97" × 0.99" × 1.8")
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Storage Temperature	−40 °C to 85 °C (−40 °F to 185 °F)
Operating Humidity	5% to 95% (no condensation)
Relative Humidity	5% to 95% (no condensation)
Installation Mode	Desk-Mounted, Wall-Mounted
Network Parameters	
Ports	1 × Gigabit PoE port, 1 × Gigabit RJ45 port
PoE Power Supply	
PoE Standard	IEEE 802.3af; IEEE 802.3at
PoE Power Budget	30 W
Approval	
EMC	CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020)
Safety	CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition), CE-LVD (EN 62368-1: 2014+A11: 2017)
Chemistry	CE-RoHS (201165EU); WEEE (201219EU); Reach (Regulation (EC) No.19072006)

▪ Typical Application

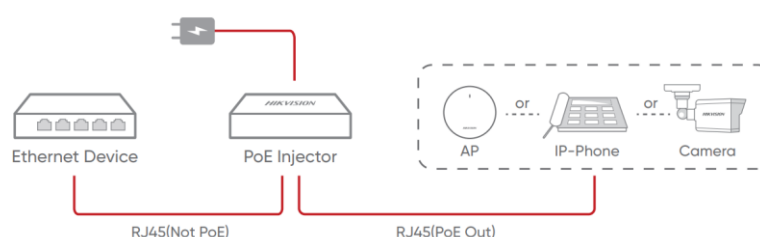

▪ Available Model

DS-3E0502P-E

See Far, Go Further



www.hikvision.com
support@hikvision.com

