


DS-1LN6APSL3

U/FTP Cat6A LSZH CPR Cca 23AWG Cable

Key Feature

- Stable electrical performance, compliant with ANSI/TIA-568.2-D, IEC61156, ISO/IEC11801.
- Compliant with RoHS 2.0.
- Sheath with strong mechanical properties, and high tensile and compressive strength, reducing damage during the project.
- Excellent performance in the Fluke 90-meter permanent link test while working continuously at 50°C high temperature.
- Excellent performance in the Fluke 100-meter channel test while being continuously loaded with 57V/1A DC power (PoE).
- Solid-Bare Copper conductor with less resistance, and better electrical properties and transmission performance.
- Reaction to CPR fire Classification: Cca s1 d1 a1.
- Good shielding performance.

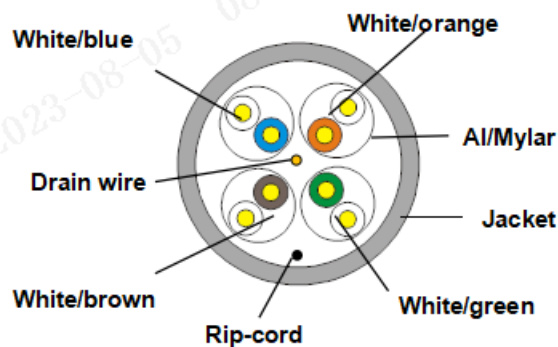

Specification

Model	DS-1LN6APSL3	
Category	Cat.6A	
Reference standard	ISO/IEC11801, ANSI/TIA-568.2-D, RoHS 2.0	
Fire resistance	CPR Cca,s1,d1,a1	
Conductor	Material	Solid-Bare Copper (99.95%)
	Diameter	0.560 ± 0.005 mm 23AWG
Insulation	Material	Skin-foam-skin PE
	Diameter	1.33 ± 0.05 mm
Sheath	Thickness	0.70 ± 0.1 mm
	Diameter	7.6 ± 0.50 mm
	Material	LSZH
	Color	Blue
Rip-cord	Yes	
Separator	No	
Drain wire	Tinned copper	
Sheath physical properties	Before aging	Tensile strength ≥ 10.0 Mpa Elongation ≥ 125%
	Aging period	100°C × 24h × 7d
	After aging	Tensile strength ≥ 8.0 Mpa Elongation ≥ 100%
	Cold bend	-20 ± 2°C × 4h, 8 × cable O.D, no visible cracks
Electrical Characteristics (20°C)	1.0-250.0 MHz	100±15
	251.0-500.0 MHz	
	impedance	100±22
	1.0-500.0 MHz delay skew	≤ 45 ns/100 m
	DC resistance	≤ 9.38 Ω/100 m
	DC conductor resistance unbalance	≤ 4.0%
	Package dimension	325 mm (W) × 380 mm (H) × 385 mm (D)
	Weight	17 ± 1kg
Cable length	(305 ± 1.5) m	
Ambient temperature	-20°C to 75°C (-4°F to 167°F)	
Operating voltage	80 V	

Technical Performance (100 m)

Frequency (MHz)	ATT (20 °C) ≤ (dB)	RL ≥(dB)	NEXT ≥(dB)	PS NEXT ≥(dB)	EL FEXT ≥(dB)	PS EL FEXT ≥(dB)	Phase delay ≤(ns)
1	2.1	20.0	74.3	72.3	67.8	64.8	570
4	3.8	23.0	65.3	63.3	55.8	52.8	552
8	5.3	24.5	60.8	58.8	49.7	46.7	547
10	5.9	25.0	59.3	57.3	47.8	44.8	545
16	7.5	25.0	56.2	54.2	43.7	40.7	543
20	8.4	25.0	54.8	52.8	41.8	38.8	542
25	9.4	24.3	53.3	51.3	39.8	36.8	541
31.25	10.5	23.6	51.9	49.9	37.9	34.9	540
62.5	15.0	21.5	47.7	45.4	31.9	28.9	539
100	19.1	20.1	44.3	42.3	27.8	24.8	538
200	27.6	18.0	39.8	37.8	21.8	18.8	537
250	31.1	17.3	38.3	36.3	19.8	16.8	536
300	34.3	16.8	37.1	35.1	18.3	15.3	536
400	40.1	15.9	35.3	33.3	15.8	12.8	536
500	45.3	15.2	33.8	31.8	13.8	10.9	536

Available Model

DS-1LN6APSL3

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

