




REV.	ECN NO.	DATE	SIGN.	DESCRIPTION
A		2020/10/10	Feng_Li	Change Rev.02 To Rev.A
B	C201766	2020/11/09	JC Chen	$\triangle B$ X4
B1		2020/11/12	JC Chen	$\triangle B1$ X1

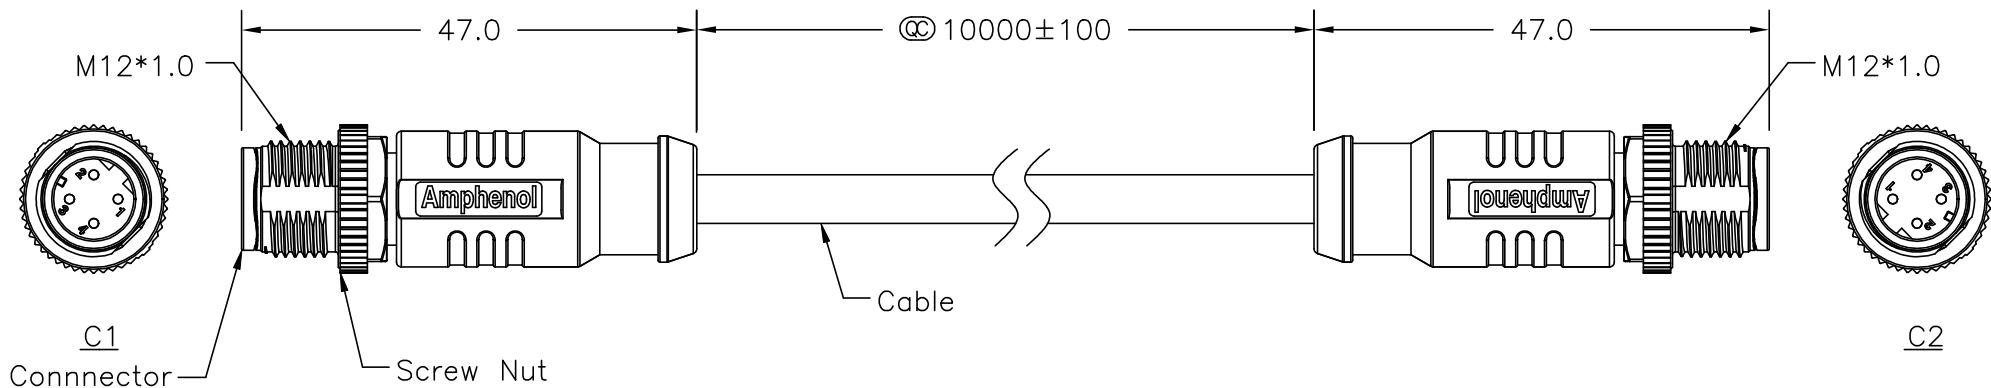

C1&C2
Pin Assignments
Front View

Shield	Braid+Drain	Shield
4	Green	4
3	Orange	3
2	White/Green	2
1	White/Orange	1
C1	Wire Color	C2

Pin Out



Notes:

- * \textcircled{C} Important Dimension.
- * Waterproof Rate: IP68.
- * Connector: Thermoplastic, Black.
- * Pin: Copper Alloy, Gold Plated.
- * Screw Nut: Metal.
- $\triangle B$ * Cable: 26AWG*2P+Braid+Drain+AL/MY, OD5.0, TPU HF Jacket, Black.
- $\triangle B$ * Operating Temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.



UNIT:mm		TITLE SEN, CA 2END, 1SERIES, M12D, 04P MM, SCREW, 4A, SEN
TOLERANCE		SCALE Free SHEET 1 OF 1
± 0.5 mm		REV. B1 SIZE A4 \textcircled{C} :Inspection Item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO DCA-X-004806_A2	DRAWN BY Feng_Li	DATE 2020/10/10
DWG NO ADC1-DDMS04AD082	CHECKED BY Jerry	DATE 2020/10/10
CUSTOMER 0020002131	APPROVED BY Max	DATE 2020/10/10

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.