

DS-MH1412-B1 6 Ports Body Camera Charge Cradle



- Charges body camera
- Compact appearance
- Convert the pogopin interface to a network interface


▪ Specification

Interface	
Indicator	Charging indicator × 6 , Internet indicator × 6
Ethernet	1 RJ-45 10 M/100 M/1000 M self-adaptive Ethernet port(s)
Charging Interface	PogoPin × 6
General	
Power	12 VDC, 5.0 A, max. 60 W
Operating Condition	0 °C to 45 °C (32 °F to 113 °F). Humidity 95% or less (non-condensing)
Dimension	350 mm × 109.96 mm × 36 mm (13.78" × 4.33" × 1.42")
Weight	0.5 Kg (without mounting) (1.1 lb.)

▪ Available Model

DS-MH1412-B1

Dimension

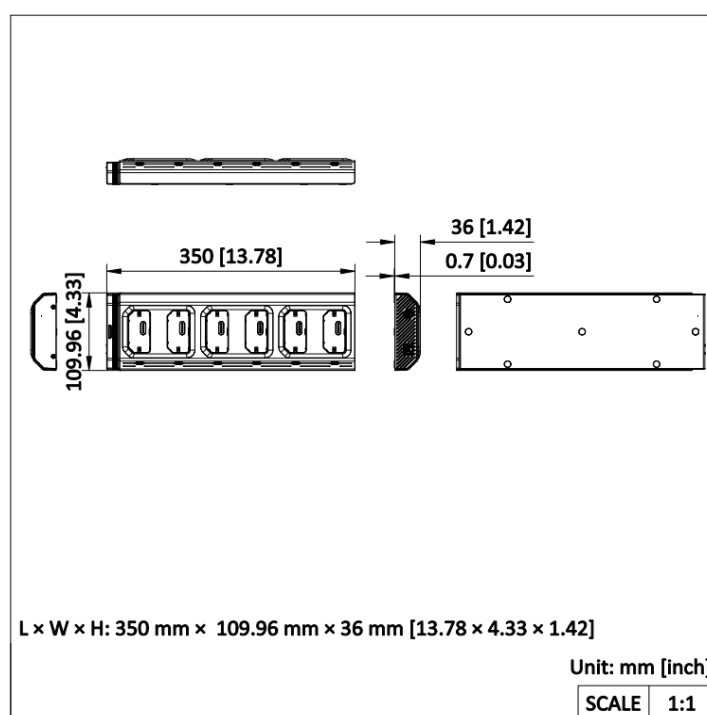

▪ Accessory



DS-MCW407(D)



DS-MCW407(A)



DS-MCW407(C)

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq