

**DS-XS6404/06/09/12-S/B**  
**Wall Mounted Cabinet**



- The enclosures conform to 19-inch mounting standards, are compatible with ETSI standard equipment installations, and are designed for rack-mounted equipment in cabling, telecom, IT, industrial, and home.

## ▪ Specification

Model		DS-XS6404-S/B	DS-XS6406-S/B	DS-XS6409-S/B	DS-XS6412-S/B
<b>Specifications</b>	Installation Method	Wall-mounted			
	Internal Space	4U	6U	9U	12U
	Static Load Capacity	40KG			
	Dimensions (W*D*H) mm	600*450*281mm	600*450*370mm	600*450*500mm	600*450*635mm
	Net Weight	14.5KG	16KG	18.7KG	21KG
<b>Parameters</b>	Opening Percentage (Front Door)	78%			
	Opening Percentage (Rear Door)	0			
	Front Door	4mm Glass door,1mm SPCC			
	Front and Rear Frame	1.2mm SPCC			
	Side Panel	1.0mm SPCC			
	Beam	1.2mm SPCC			
	Top Cover	1.0mm SPCC			
	Bottom panel	1.0mm SPCC			
	Vertical rail	1.5mm SPCC			
	Rear panel	1.0mm SPCC			
	Mounting bracket	1.2mm SPCC			
<b>Others</b>	Shelf	Optional			
	FAN	Optional			
	PDU	Optional			

## ▪ Available Model


DS-XS6404-S/B(Overseas)

DS-XS6406-S/B(Overseas)

DS-XS6409-S/B(Overseas)

DS-XS6412-S/B(Overseas)

## ▪ Dimension

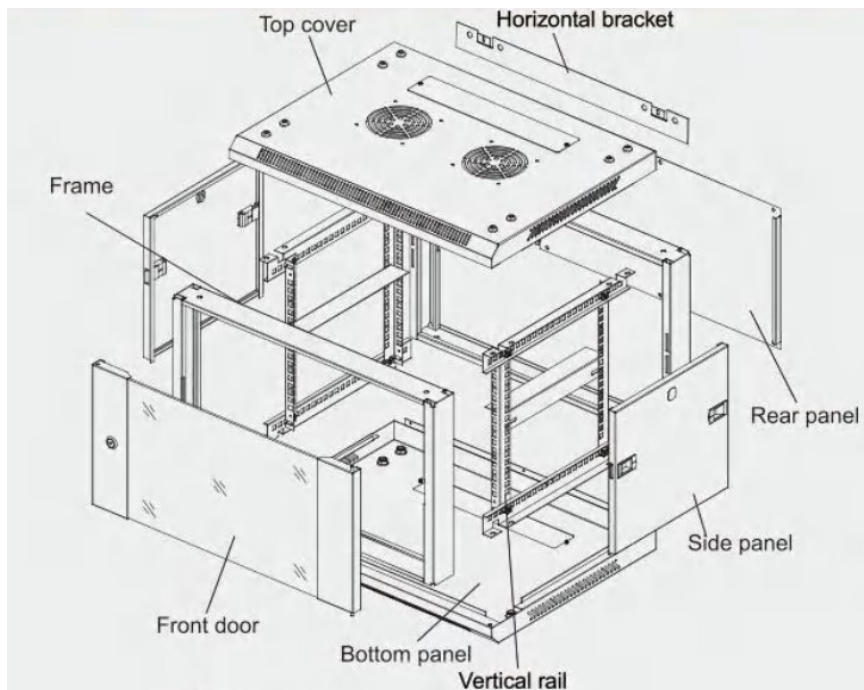

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

