

DS-XS6604/06/09/12-S/BR
Wall Mounted Cabinet



- The cabinet frame is welded from door frames and cross beams, ensuring a solid overall structure. This cabinet features a dual-section design, supporting front and rear door access, facilitating equipment installation and maintenance. The cabinet meets the 19-inch mounting standard and is compatible with ETSI standard equipment installation. Internal dimensions can be customized to user requirements. Suitable for data centers, voice rooms, wiring closets, production areas, and warehouses, where the protection and maintenance of heavy-duty network equipment are needed.

▪ Specification

Model		DS-XS6604-S/BR	DS-XS6606-S/BR	DS-XS6609-S/BR	DS-XS6612-S/BR
Specifications	Installation Method	Wall-mounted			
	Internal Space	4U	6U	9U	12U
	Static Load Capacity	60KG			
	Dimensions (W*D*H) mm	600*600*281mm	600*600*370mm	600*600*500mm	600*600*635mm
	Net Weight	19KG	21KG	25KG	28.5KG
Parameters	Opening Percentage (Front Door)	78%			
	Opening Percentage (Rear Door)	78%			
	Front Door	4mm Glass door,1mm SPCC			
	Front and Rear Frame	1.2mm SPCC			
	Side Panel	1.0mm SPCC			
	Beam	1.2mm SPCC			
	Top Cover	1.2mm SPCC			
	Bottom panel	1.2mm SPCC			
	Vertical rail	1.5mm SPCC			
	Rear panel	1.2mm SPCC			
Others	Shelf	Optional			
	FAN	Optional			
	PDU	Optional			

▪ Available Model


DS-XS6604-S/BR(Overseas)

DS-XS6606-S/BR(Overseas)

DS-XS6609-S/BR(Overseas)

DS-XS6612-S/BR(Overseas)

▪ Dimension

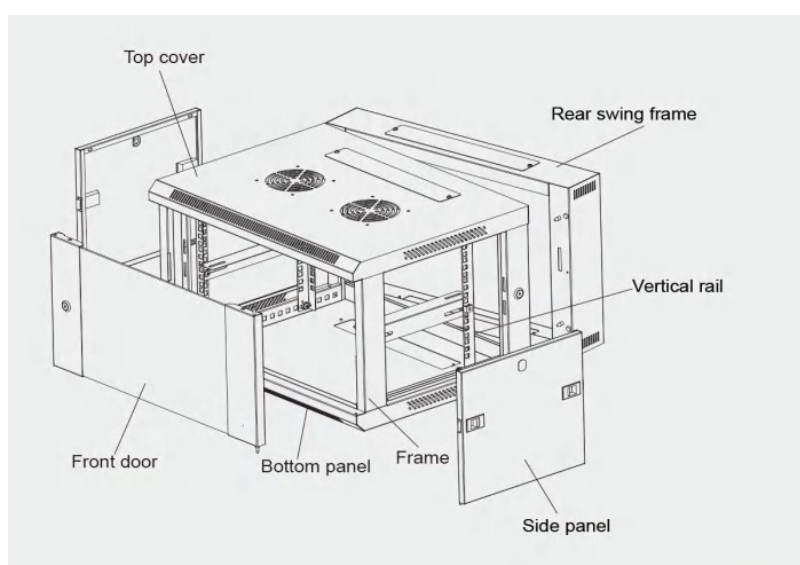

See Far, Go Further



www.hikvision.com
support@hikvision.com

