

DS-K2M0012X I/O Expansion Module



I/O expansion module supports communication with access controller via RS-485

- Supports 8 inputs and 4 outputs
- Supports communication with access controller via RS-485
- Installation with guide rail
- Supports battery charging and discharging
- Supports indicators for indicating power status, communication status, running status, and door status



▪ Specification

System	
Operating system	MCU
ROM	512 KB
RAM	64 KB
Processor	M5S
Interface	
Alarm input	8
Alarm output	4
TAMPER	1
RS-485	2, 2 for access controller
General	
Indicator	1 for indicating power status, 1 for running status, 2 for communication status, and 4 for alarm output
Battery	Charge and discharge
Power supply	12 ± 15% VDC
Power consumption	≤5 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	0% to 90% (No condensing)
Installation	Installation with guide rail
Function	
Configuration via Web browser	Support via access controller
HikCentral Professional	Support via access controller

▪ Available Model

DS-K2M0012X

▪ Dimension

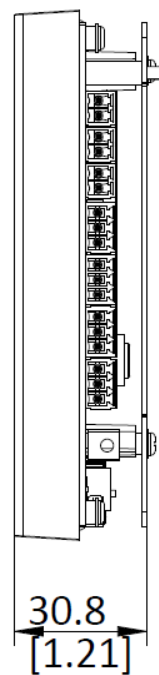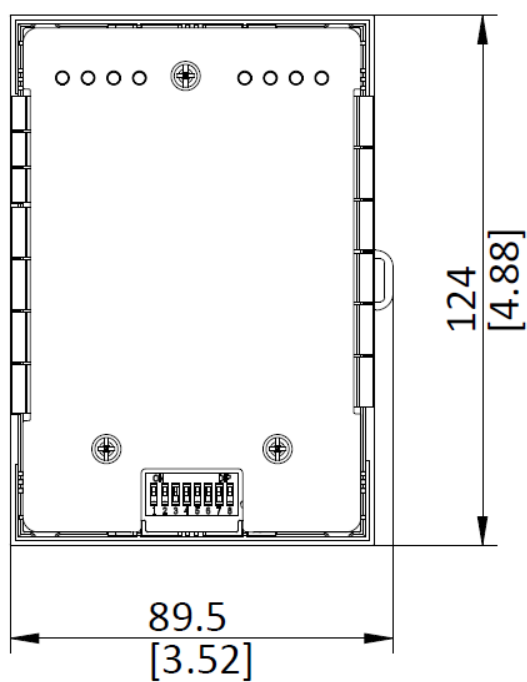

Unit: mm [inch]

SCALE	3:1
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com

