

## DS-D4226FI-CGFF Indoor Fixed LED Display Unit




- A variety of size design, supporting splicing, to meet the needs of various flexible sizes.
- No module shell design, die-casting aluminum case, ultra-thin thickness, beautiful and elegant.
- Lamp board front maintenance magnetic design, easy to maintain and install.
- Supports arc solution. Horizontal 0° to 90° outside the arc and vertical 10° outside the arc with more creative forms.
- Supports signal cable backup.
- Supports module rotation and horizontal and vertical mixed splicing.
- TUV-CE/ROHS/CB certificate completed.

## ▪ Specification

	Model	DS-D4226FI-CGFF
<b>Cabinet</b>	Pixel Configuration	SMD Triad LED
	Pixel Pitch Category	P2.6
	Pixel Pitch	2.604 mm
	Modules Component	2 × 4
	Dimensions (W × H × D)	1000 (W) mm × 500 (H) mm × 50 (D) mm (39.37" × 19.69" × 1.97")
	Resolution	384 × 192
	Area	0.5 m <sup>2</sup> (775.00 in <sup>2</sup> )
	Weight	10.54 kg (23.24 lb)
	Pixel Density	147456 dots/m <sup>2</sup>
	Lamp Board Housing	With housing
	Cabinet Material	Aluminum die casting
	Maintenance Method	Front maintenance for all components
	Cabinet Flatness	0.1 mm
	Protection Level	Front protection level IP60
<b>Display</b>	White Balance Brightness	800 cd/m <sup>2</sup> (Peak 1000 cd/m <sup>2</sup> )
	Color Temperature	3000 K to 10000 K adjustable
	Viewing Angle	Horizontal 160°, vertical 160°
	Contrast Ratio	≥ 5000:1
	Color Uniformity	≤ ± 0.003Cx, Cy
	Brightness Uniformity	≥ 97%
<b>Processing Performance</b>	Driving Method	Constant current driving
	Frame Frequency	60 Hz
	Refresh Rate	Up to 3840 Hz
	Grey Level	Up to 16 bit
	Display Color	281 trillion
<b>Power</b>	Power Supply	110~220 VAC ± 15%
	Max. Consumption	≤ 600 W/m <sup>2</sup>
	Average Consumption	< 185 W/m <sup>2</sup>
<b>Working Environment</b>	Working Temperature	-10 °C to 40 °C (14 °F to 104 °F)
	Working Humidity	10% RH to 80% RH
	Storage Humidity	10% RH to 80% RH
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140°F)
<b>General</b>	Gross Weight	123 kg (271.17 lb) (Wooden Box, 6 cabinets in 1 box)
	Package Dimension (W × H × D)	1333 (W) mm × 890 (H) mm × 744 (D) mm (52.48" × 35.04" × 29.29") (Wooden Box, 6 cabinets in 1 box)
	Lifespan	Lamp 100,000 hours


▪ Typical Application

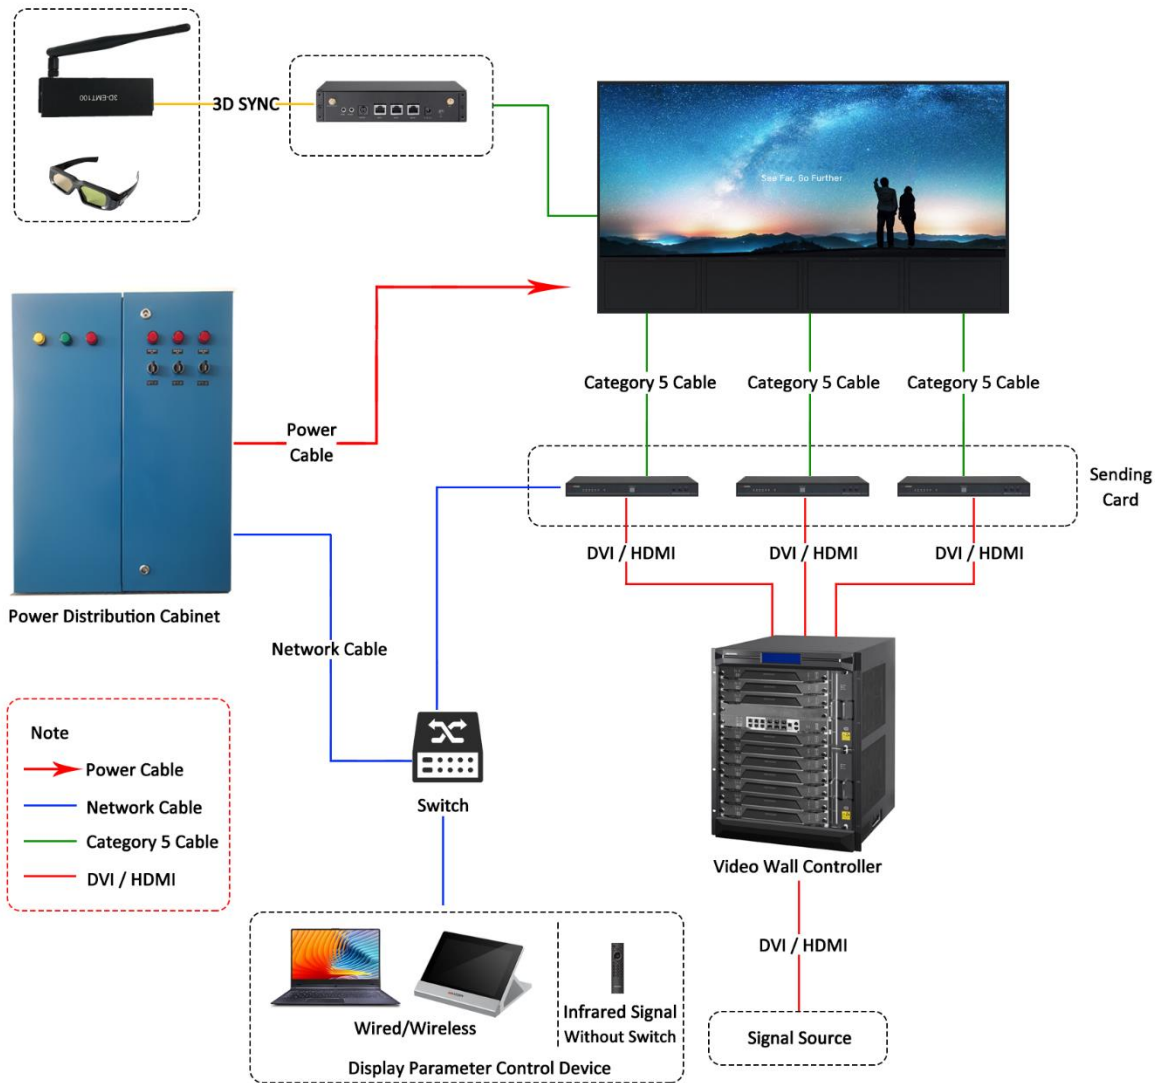

▪ Available Model


DS-D4226FI-CGFF

▪ Dimension

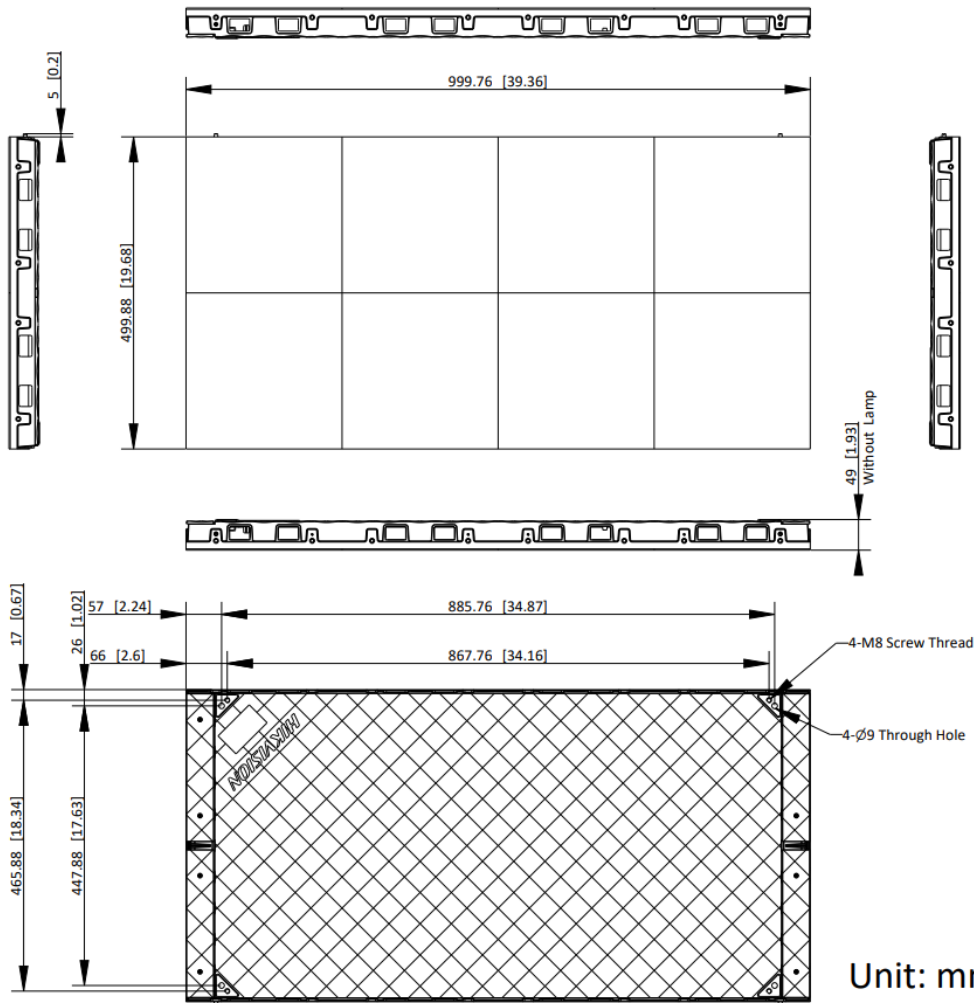

Unit: mm [inch]

SCALE	1:1
-------	-----

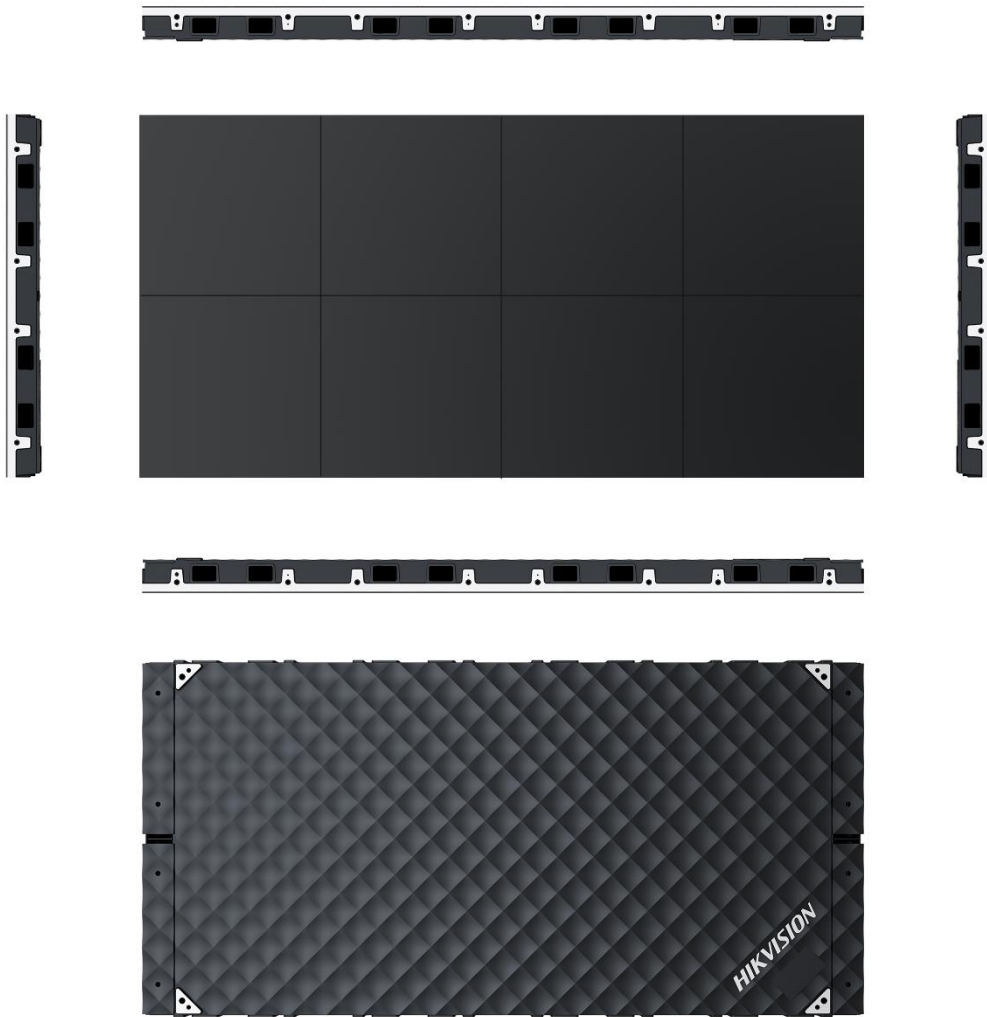

- Accessory
- Included

DS-D42C04-N LED Control Card	DS-D42C06-N LED Control Card
	

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global

Hikvision  
Corporate Channel

hikvisionhq