

DS-D42A0FO-CLF P10 Outdoor Fixel LED Display Unit



- Support front and rear maintenance
- Using aluminum chassis, good heat dissipation and can work under 60 °C
- All series aluminum profile cabinets support IP67(F)/IP66(R)
- Apply unique technology, maximally saving 50% energy
- Various cabinet sizes, applying to diverse scenes
- The cabinets support customized 45° corner cut to realize 90° right-angle splicing


▪ Specification

| Model | | DS-D42A0FO-CLF |
|------------------------|--------------------------------|---|
| Cabinet | Pixel Configuration | 1R1G1B |
| | Pixel Pitch Category | P10 |
| | Pixel Pitch | 10 mm |
| | Modules Component | Aluminum Shell |
| | Dimensions (W × H × D) | 960 mm × 960 mm × 97 mm (37.8" × 37.8" × 3.82") |
| | Resolution | 96 × 96 |
| | Area | 0.9216 |
| | Weight | 28 KG/PCS |
| | Pixel Density | 10000 dots/m ² |
| | Lamp Board Housing | YES |
| | Cabinet Material | Aluminum Profile |
| | Maintenance Method | Front/Back Maintenance |
| | Cabinet Flatness | 0.8 mm |
| | Protection Level | IP67(F)/IP66(R) |
| Display | White Balance Brightness | 6000 |
| | Color Temperature | 3000 K to 10000 K |
| | Viewing Angle | 160° (H)/80° (V) |
| | Contrast Ratio | 8000:1 |
| | Color Uniformity | ≥ 95% |
| | Brightness Uniformity | ≥ 95% |
| Processing Performance | Driving Method | Constant Current |
| | Frame Frequency | 50/60 HZ |
| | Refresh Rate | 3840 |
| | Grey Level | 14 bit |
| | Display Color | DCI-P3 > 85% |
| Power | Power Supply | 110 to 220 |
| | Max. Consumption | 580 |
| | Average Consumption | 200 |
| Working Environment | Working Temperature | -40 to 60 °C |
| | Working Humidity | 10% to 95% RH (non-condensing) |
| | Storage Humidity | 10% to 95% RH (non-condensing) |
| | Storage Temperature | -40 to 80 °C |
| General | Gross Weight | 190 |
| | Package Dimensions (W × H × D) | 1040 mm × 750 mm × 1130 mm |
| | Lifespan | 100000 Hours |

▪ **Available Model**

DS-D42A0FO-CLF

▪ **Dimension**

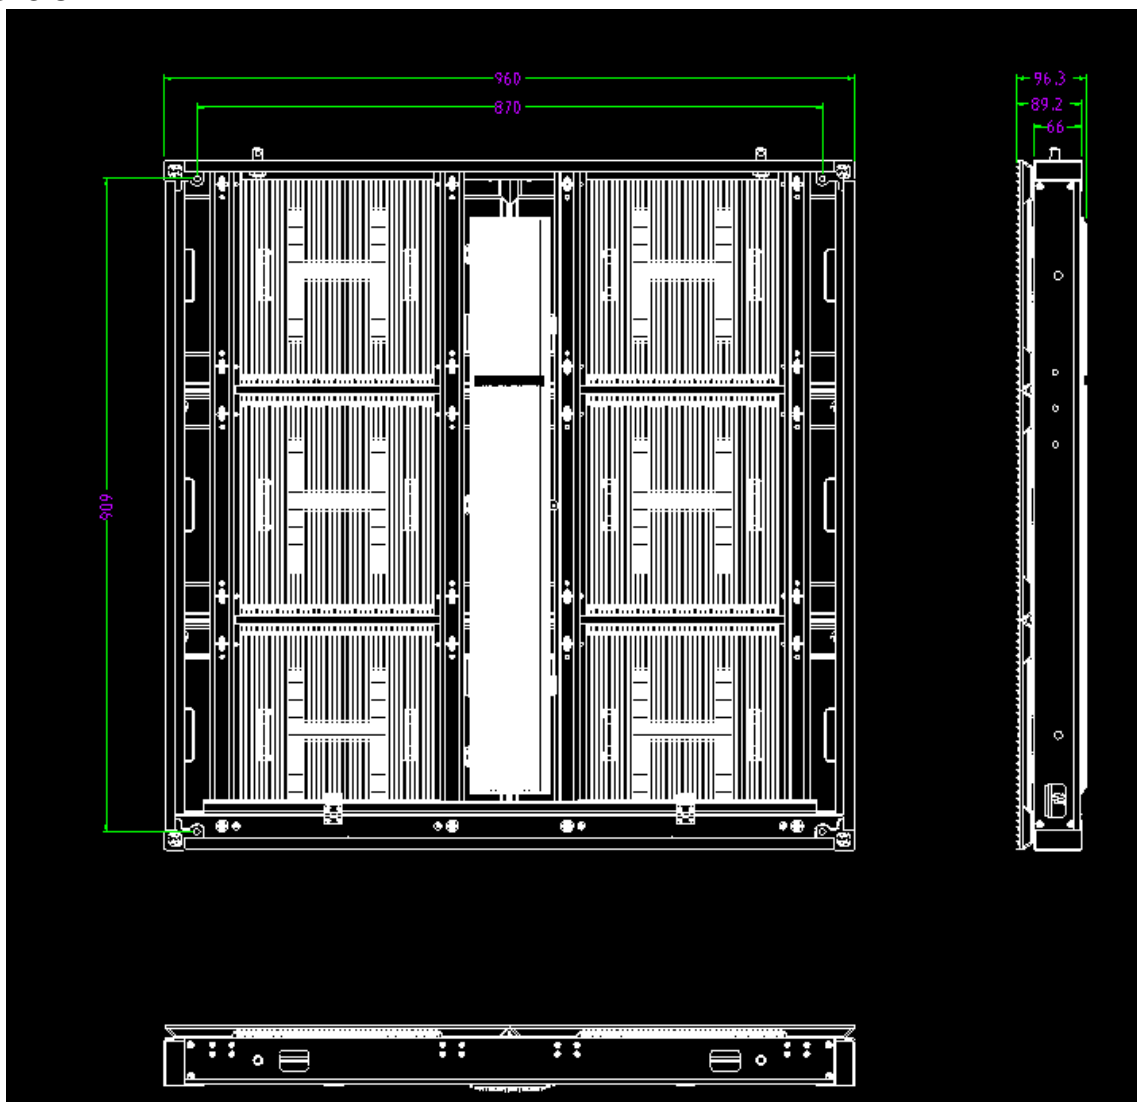

Unit: mm

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

