

## DS-K1T502DBFWX-C Access Control Terminal



- Manage access control and intercom functions in one device
- IP65 & IK09 protections, as well as increased stability with zinc alloy materials
- Supports multiple authentication methods (card, fingerprint, PIN, etc.)
- Remote control via the Hik-Connect mobile app
- Connects to external access controller via Wiegand protocol
- Video intercom via SIP protocol. Supported SIP server: Brekeke, miniSipServer, FreePBX, Asterisk, 3CX, ELASTIX, and PBX ware
- RS-485 communication for connecting external card reader and calling elevator
- Supports AP mode
- Press calling button to call one of the following objects: management center, indoor station, specified indoor station, or Hik-Connect App
- Supports up to 256 GB SD card memory
- Supports PIN settings under platform mode and local mode
- Setting the priority of wired network and wireless network is available


## ▪ Specification

<b>System</b>	
Operating system	Linux
<b>Video</b>	
Lens	1
Video compression standard	H.264 and H.265
Resolution	2 MP
FOV	HFOV = 110°; VFOV = 81°; DFOV = 122°
Video standard	PAL (Default) and NTSC
<b>Network</b>	
Wired network	10 M/100 M self-adaptive
Wi-Fi	Support
<b>Interface</b>	
Network interface	1
Lock control	1
Exit button	1
Door contact input	1
Alarm input	1
Alarm output	1
TAMPER	1
RS-485	1
Wiegand	1 (output)
SD Card Slot	1
<b>Capacity</b>	
Fingerprint capacity	10,000
Card capacity	100,000
Event capacity	300,000
<b>Authentication</b>	
Fingerprint module	Capacitive fingerprint recognition
Card type	M1 card, DESfire card
Card reading distance	0 to 3 cm
<b>Function</b>	
Two-way audio	Support
Video intercom	Support
Hik-Connect	Support
<b>General</b>	
Power supply	1 A (12 VDC to 24 VDC)
Power consumption	≤12 W
Working temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Protective level	IK09, IP65
Language	Arabic, English, French, Indonesian, Italian, Portuguese (Brazil), Russian, Spanish (Europe), Thai, Ukrainian, Vietnamese, German, Polish, Hungarian, Czech, Romanian, Bulgarian, Croatian, Serbian, Greek, Slovak, Portuguese, Dutch, and Turkish

▪ Available Model

DS-K1T502DBFWX-C

▪ Dimension

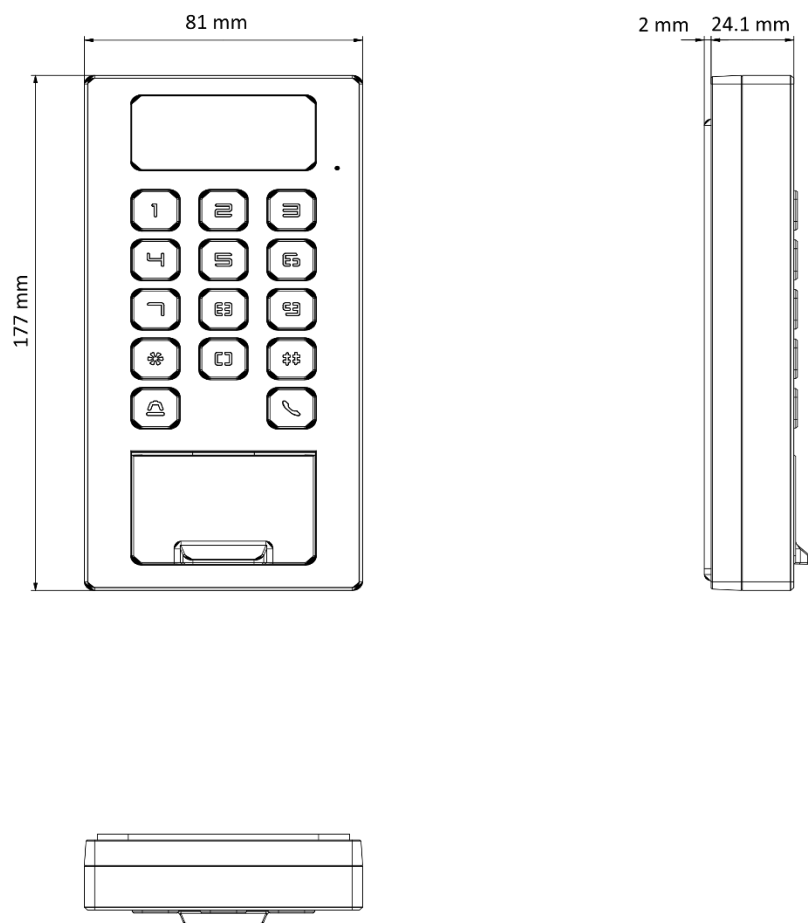

▪ Accessory

▪ Optional

DS-KAB502-S1



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

