

## DS-KD8003-IME1(B)/Flush Modular Door Station



- Modular door station Main unit, needs mounting bracket
- 2MP HD Camera, Fish eye, IR Supplement
- 1 Call physical Button, 2 lock relays, 4-ch alarm input
- Video intercom to indoor station and master station
- WEB Configuration
- IP65, 12 VDC or standard PoE
- Power output for electronic lock, max to 12 V, 500 mA

## ▪ Specification


| System parameters              |   |
|--------------------------------|---|
| Operating system               | Embedded Linux operation system                   |
| ROM                            | 32 MB   |
| RAM                            | 256 MB  |
| CPU                            | Embedded Processor                                |
| Display parameters             |   |
| Screen size                    | NA  |
| Operation method               | NA  |
| Type                           | NA  |
| Resolution                     | NA  |
| Video parameters               |   |
| Supplement light               | Low illumination, IR supplement lights            |
| Video standard                 | H.264   |
| Lens                           | 1   |
| FOV                            | Horizontal: 146°, Vertical: 82°                   |
| WDR                            | Support   |
| Resolution                     | 2 MP  |
| Audio parameters               |   |
| Audio input                    | Built-in omnidirectional microphone               |
| Audio output                   | Built-in loudspeaker                              |
| Audio compression standard     | G.711 U, G.711 A                                  |
| Audio compression bitrate      | 64 Kbps   |
| Audio quality                  | Noise suppression and echo cancellation           |
| Volume adjustment              | Adjustable  |
| Capacity                       |   |
| Fingerprint capacity           | /   |
| User capacity                  | 2000  |
| Face capacity                  | NA  |
| Card capacity                  | 6000  |
| Linked indoor station capacity | 500   |
| Event capacity                 | /   |
| Sub door station capacity      | 16  |
| Network parameters             |   |
| Ethernet                       | 10/100 Mbps Self-Adaptive Ethernet                |
| Communication protocol         | TCP/IP, RTSP                                      |
| Wired network                  | 10/100 Mbps self-adaptive Ethernet                |
| Wi-Fi                          | NA  |
| Bluetooth                      | NA  |
| 3G/4G                          | NA  |
| Device interfaces              |   |
| Alarm input                    | 4 (2 exit buttons and 2 door contacts by default) |
| Network interface              | 1 RJ45  |
| TAMPER                         | 1   |
| I/O input                      | 4   |

|                         |   |
|-------------------------|---|
| I/O output              | 2   |
| Exit button             | 2 (2 for lock control)  |
| Door contact input      | 2   |
| RS-485                  | 1 (1 for Hikvision's sub module communication)  |
| Wiegand                 | NA  |
| TF card                 | NA  |
| Alarm output            | NA  |
| Lock control            | 2 (2 relay, max to 30 V, 2 A)   |
| USB                     | NA  |
| Power interface         | 12 VDC power output (max to 12 V, 500 mA)   |
| Two-wire IP interface   | NA  |
| <b>General</b>          |   |
| Power supply            | 12 VDC/PoE ( IEEE 802.3af)  |
| Working temperature     | -40° C to 60° C (-40° F to 140° F)  |
| Working humidity        | 10% to 95%  |
| Button                  | 1   |
| Protective level        | IP65  |
| Installation            | Flush mounting  |
| Dimensions(L × W × H)   | Device: 98 mm × 100 mm × 42 mm (3.86" × 3.94" × 1.65")<br>Cover: 134 × 124 × 4 mm (5.28" × 4.88" × 0.16")<br>Gang Box: 134 × 135 × 56 mm (5.28" × 5.31" × 2.20")                                |
| Language                | English,French,Portuguese,BrazilianPortuguese,Spanish,Russian,German,Italian,Polish, Turkish,Vietnamese,Arabic,Czech,Hungarian,Dutch,Romanian,Bulgarian,Ukrainian,Croatian,Serbian,Greek,Slovak |
| Indicator               | 0   |
| Weight                  | Without package: 0.375 kg<br>With Package: 0.853 kg   |
| Battery                 | /   |
| Application environment | Outdoor   |
| Power consumption       | ≤ 5 W   |

### ▪ Available Model

DS-KD8003-IME1(B)/Flush

### ▪ Dimension

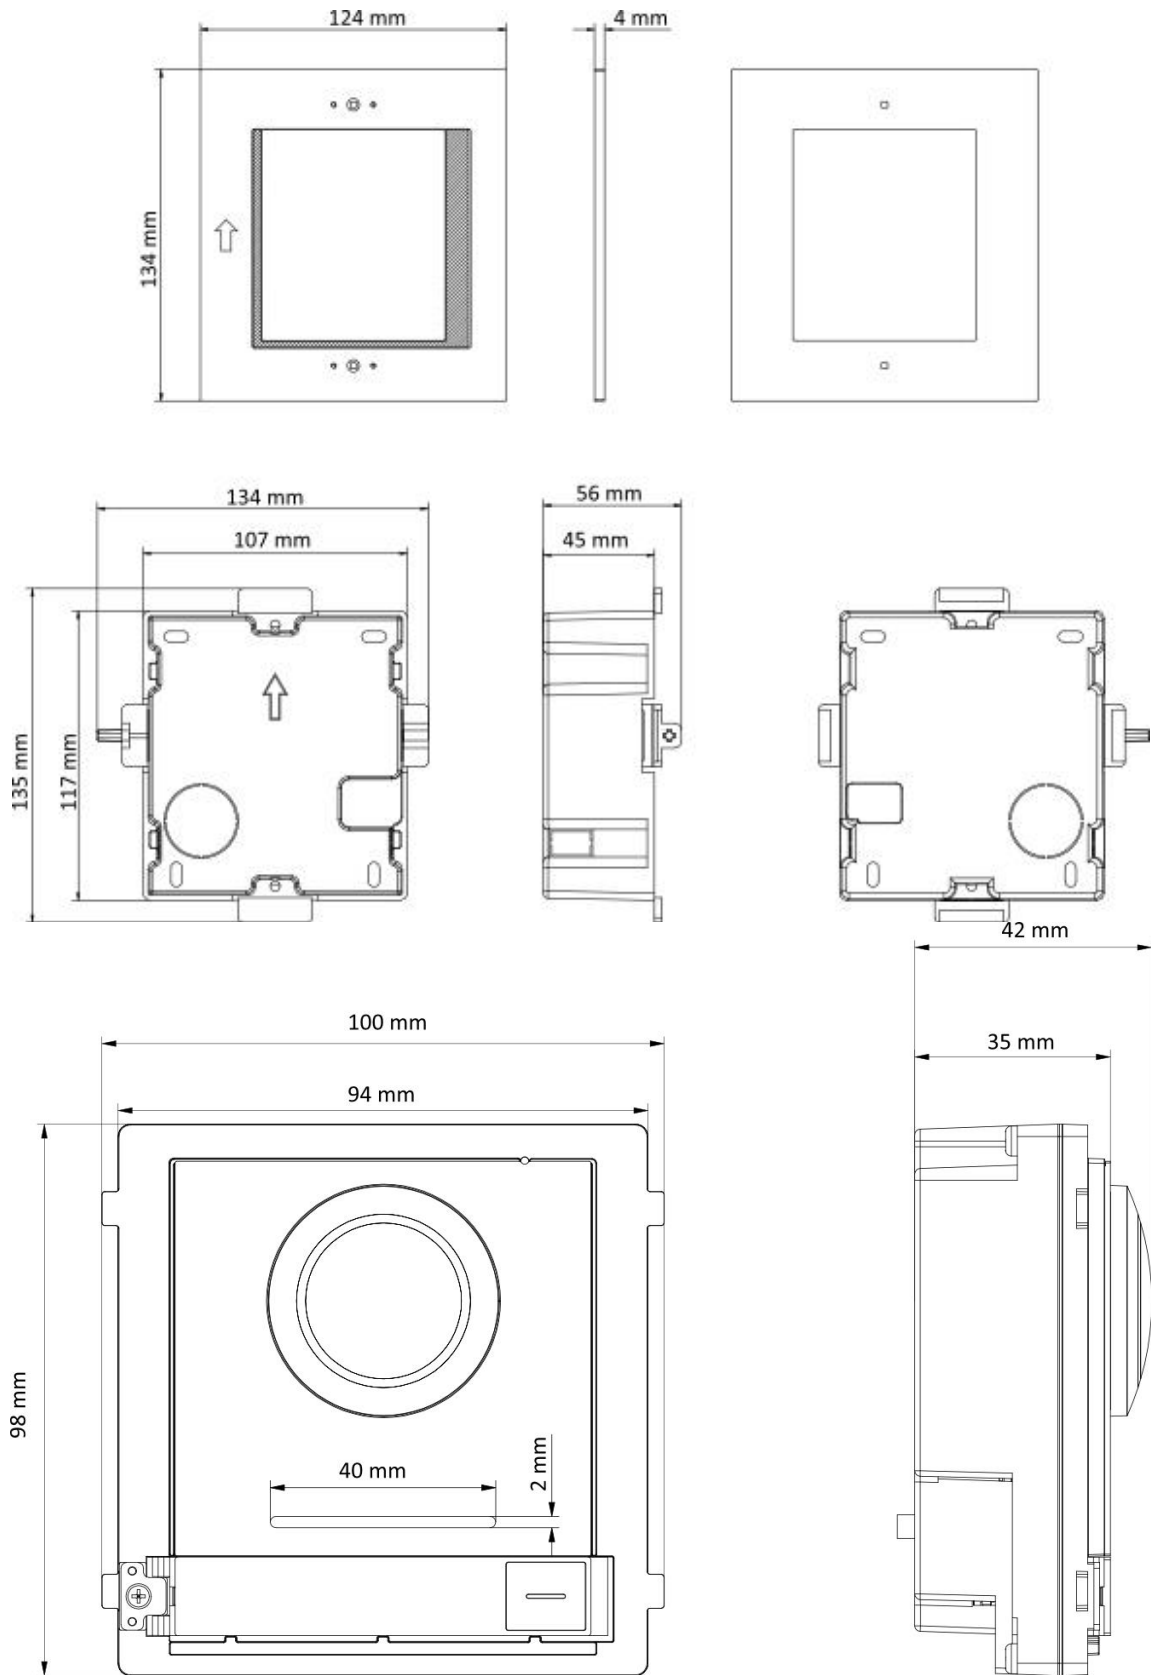

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

