

DS-MDS005 Dock Station



- Dual system design which is highly stable.
- Supports wall mount, mobile mount, and desktop mount.
- 13.3-inch ultra-large touchscreen with 1920 × 1080 resolution and convenient operation.
- Unlocks body camera bin by recognizing face to guarantee safe device storage.
- Supports auto uploading of body camera data (picture, video, and audio), and clearing the storage space of body camera automatically.
- Locks important data of body camera to avoid being deleted.
- Supports data protection in sudden power cutoff.
- ANR for data uploading to prevent data loss.
- Local upgrade.
- Multi-user management. Multi-users can be associated with one dock station.

**Notes:*

**Wall-mounted bracket and bracket assembly are required for the dock station DS-MDS003/DS-MDS005.*

**Wall mount: Please order the bracket (DS-MH1901 or DS-MH1902).*

**Desktop and mobile mount: Please order the bracket (DS-MH1901 or DS-MH1902) and bracket assembly (DS-MH1601 or DS-MH1602).*


▪ Specification

Camera	
White Light	Supported
Lens	
Focal Length	4.3 mm
FOV	79°
Aperture	F2.5
Screen	
Resolution	1920 × 1080
Screen Size	13.3"
Touchscreen	Supported
Screen Type	TFT
Storage	
HDD	Up to 4 disks (Max. 8 TB for each disk) and default 2 TB
RAM	2 GB
Wireless Network	
NFC	Working Frequency: 13.56 MHz Protocol Standard: ISO14443A/B, ISO15693, NFC-IP1, NFC-IP2, etc. Label Standard: M1 card (S50, S70), CPU card, NFC label, etc.
Network	
Protocol	HTTPS, RTSP, NTP, FTP
API	ONVIF (PROFILE S, PROFILE G, PROFILE T), ISAPI, SDK, ISUP5.0
Interface	
Indicator	1 indicator for power, every dock has 1 tricolor indicator.
Button	Power
Ethernet	1 RJ45 10M/100M/1000M self-adaptive ethernet port(s)
USB	1 for USB 2.0, 1 for USB 3.0
VGA	1
Fingerprint Module	Supported
General	
Operating Condition	-10 °C to 55 °C (14 °F to 131 °F). Humidity 95% or less (non-condensing)
Power	100 to 240 VAC, max. 420 W
Dimension	590 mm × 586 mm × 85.2 mm (23.23" × 23.07" × 3.35")
Weight	18 kg (without mounting) (39.68 lb.)
Installation Method	Desk-Mounted, Wall-Mounted, Cell-Mounted, Movable Bracket
Client	Hik-Connect, HikCentral Pro, Hik-Connect, HikCentral Master
Web Browser	Plug-in required live view: IE 10+
Operating System	Linux, Android 5.1.1
Speaker	1 Built-in speaker, Max. power consumption: 2 W, Max. sound pressure level: 99 dB (10 cm)
Approval	
RF	CE-RED: EN 300 330V2.1.1
EMC	CE-EMC: EN 55032: 2015/A11:2020, EN IEC61000-3-2: 2019/a1:2021, EN 61000-3-3: 2013/A2:2021, EN 50130-4: 2011 +A1: 2014
Safety	CB: IEC 62368-1: 2014+A11, IEC 62368-1:2018 CE-LVD: EN 62368-1: 2014/A11: 2017
Environment	CE-RoHS: EN IEC63000:2018

▪ Available Model

DS-MDS005/2T/8/FP/IC

▪ Dimension

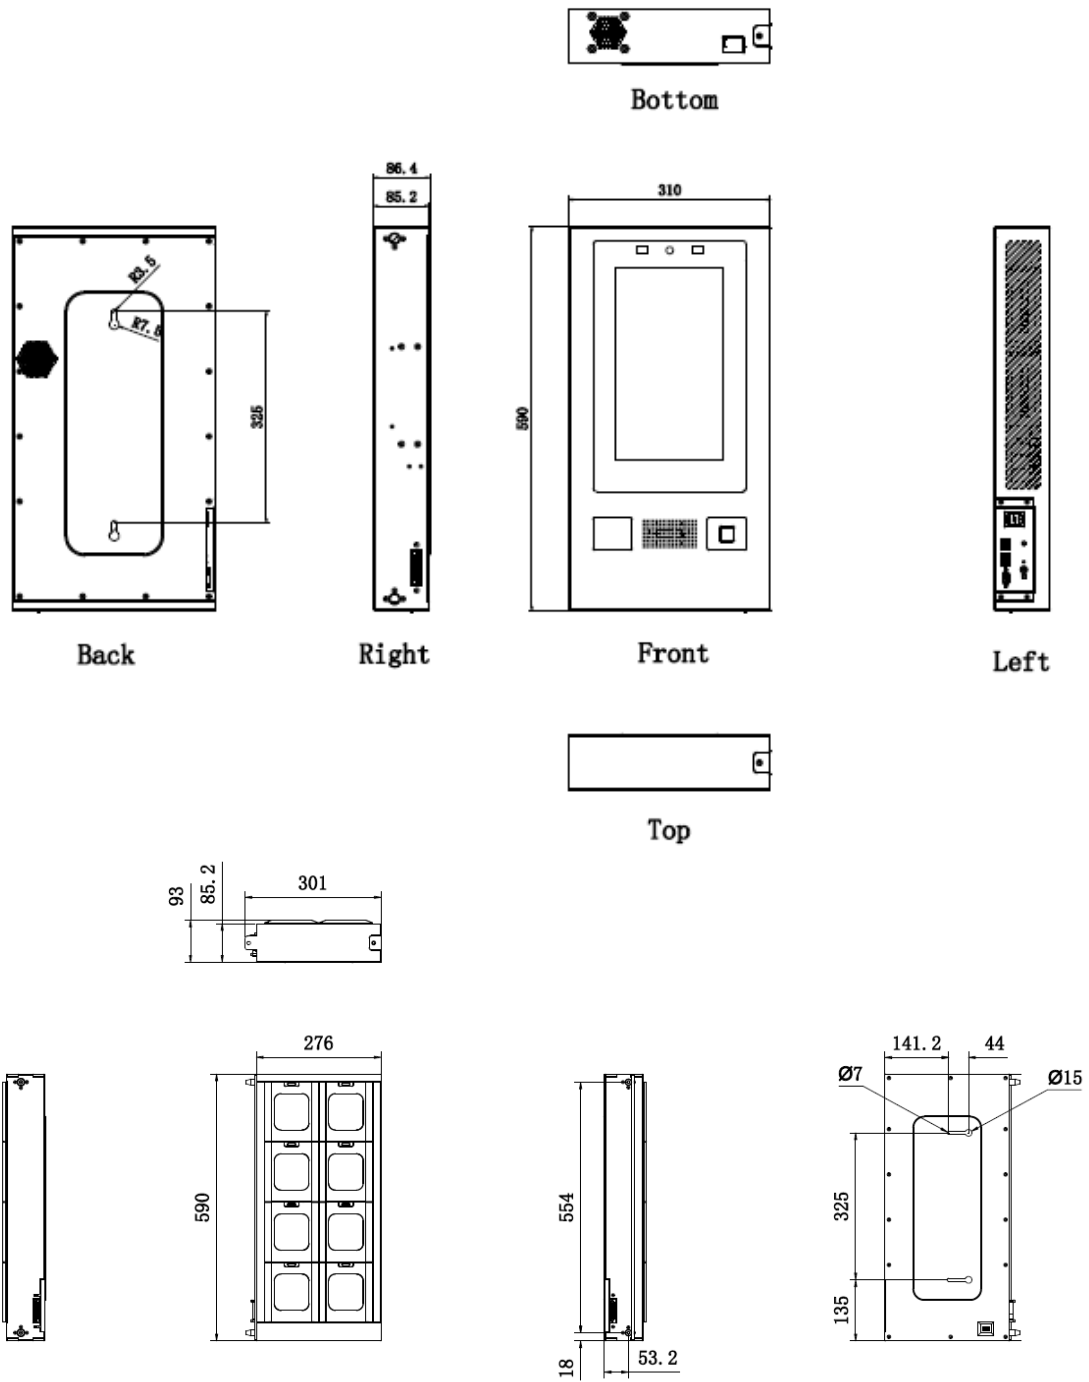

Unit: mm

▪ **Accessory**

▪ **Optional**

DS-MH1601 MDS003 Dockstation Desktop Bracket	DS-MH1901 MDS003 Dockstation Mount Bracket 8 or 16 slots	DS-MH1902 MDS003 Dockstation Mount Bracket 16 or 24 slots	DS-MH2311(C) Body Camera	DS-MH1602 Mobile Bracket
				
DS-MCW406 Body Camera	DS-MCW407(D) Body Camera	DS-MCW40B Body Camera	DS-MDS005-E Dock Station	
				

Headquarters

No.555 Qianmo Road, Binjiang District,
 Hangzhou 310051, China
 T +86-571-8807-5998
 www.hikvision.com



Follow us on social media to get the latest product and solution information.

