

DS-QAZ0203G1-S
3 W Ceiling Secondary Speaker




- Connecting the primary speaker for amplification.

▪ Specification

Speaker	
Rated Power	3 W
Impedance	8 Ω
Direction	All directions
Sensitivity(1 m, 1 W)	93 dB
Max. Acoustic Pressure	97 dBSPL
Frequency Response	300 Hz to 15 kHz
SNR	82 dB
Interface	
Audio In	Fixed resistance input × 1 , 8 Ω *The primary speaker(3 W, 8 Ω) can be connected to a maximum of 3 secondary speakers(3 W, 8 Ω).
General	
Operating Temperature	10 °C to 50 °C
Material	Device body: plastic; Mesh cover: metal
Dimension	∅179 mm × 77.5 mm (∅7.05" × 3.05") (Hole Size: 160 mm)
Package Dimension	255 mm × 243 mm × 175 mm (10.04" × 9.57" × 6.89")
Weight	Approx. 0.3 kg (0.66 lb.)
With Package Weight	Approx. 0.45 kg (0.99 lb.)
Color	White
Operating Humidity	< 90% (No condensation)
Packing List	Device × 1 Mesh cover × 1 Regulatory Compliance and Safety Information × 1



▪ Wiring

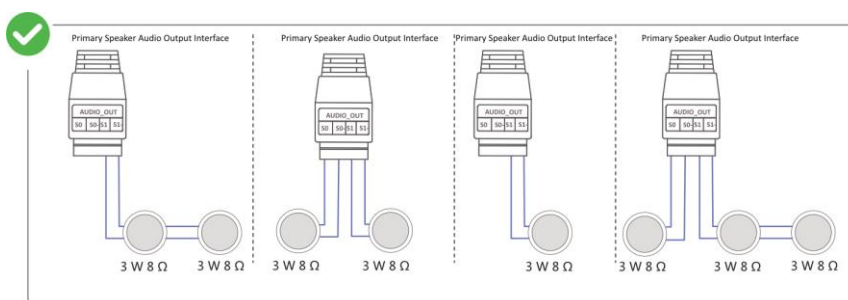

▪ Available Model

DS-QAZ0203G1-S

▪ Dimension



Unit: mm (inch)

Diagram of Back Interface



Red wire clamp is for positive pole. Black wire clamp is for negative pole.

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

