

P60X60EUGR

40W low UGR High Quality Panel


Options:



Product



Measures

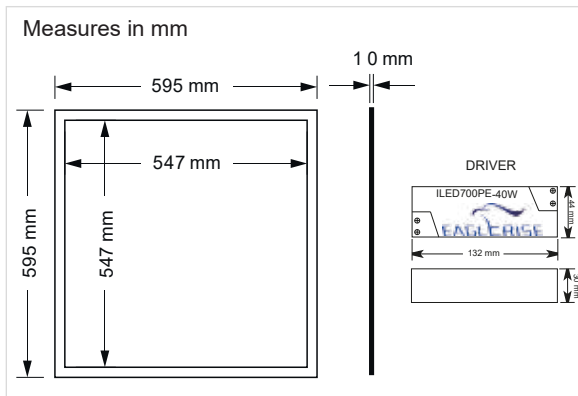


Technical Data


Power supply:	AC 220~240V 50/60Hz
Power:	40W
Nº of LEDs:	216 chips SMD4014
Power factor:	>0.95
Luminous efficiency:	101 lm/w
LED power:	0.18W
Luminous flux:	4040 lm (BF) 4010 lm (BN)
Luminous intensity:	2010cd
UGR:	<19
IP Code:	IP20
Operating temperature:	-10°C +40°C
Nº of switching:	30.000
Certifications:	CE, RoHS
Energy Efficiency:	A+
Lifespan:	50.000h (L70:B10)
Diffuser:	opal polycarbonate
Body:	aluminium
Dimming:	Si, DM250-700mA (Opcional)
Weight:	3815 gramos

Photometric data


Angle = 120°
Luminous Flux = 4040 lm
Colour Temperature CCT = 6000K (BF)
CRI => 80

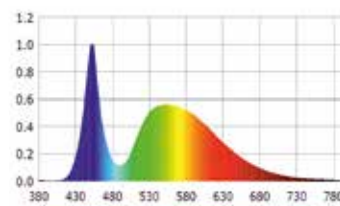


Cool White




Angle = 120°
Luminous Flux = 4010 lm
Colour Temperature CCT = 4000K (BN)
CRI => 80

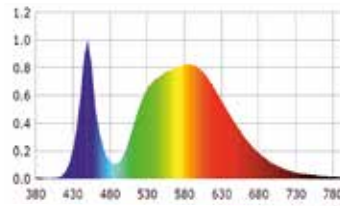

Natural White



Luminous Intensity Distribution Curve

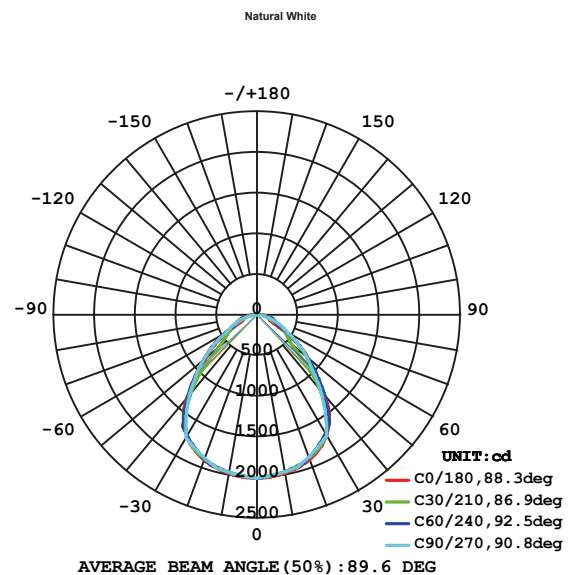

Chip used

EPIDAR



ThreeLine TECHNOLOGY