

## Two-Wire Video Intercom Bundle



### Key Features

#### Door Station

- Video intercom function
- Access control function
- HD video surveillance with high performance CMOS
- Low illumination 2MP HD colorful 155° fish-eye camera
- Self-adaptive IR supplement
- Tampering alarm and door magnetic alarm supported
- Noise suppression and echo cancellation
- Remote upgrade via client and batch configuration function
- Supports surface mounting and flush mounting

#### Indoor Station

- Hands-free audiovisual communication with the door station and the master station in the intercom system
- Supports monitoring door stations and external cameras
- Supports auto-answering and no-disturbing mode
- Noise suppression and echo cancellation
- Supports 8-ch zone alarm input
- Supports panic call
- Remote unlocking via the client or the app
- Community notice supported
- Convenient installation and easy operation

#### Video/Audio Distributor



- Nine two-wire interface to support nine two-wire indoor stations
- One 10/100M self-adaptive network interface to support external switch
- 24 VDC power supply and communications between door stations and indoor station
- Industrial design and wall mounting supported

## Specifications

DS-KV8103-IME2

Specifications

Model		DS-KV8103-IME2
System parameters	Processor	High-Performance Embedded SOC Processor
	Operation system	Embedded Linux Operation System
Video parameters	Camera	CMOS Low Illumination 2 MP HD Colorful 155° Fisheye Camera
	Video compression standard	H.264
	Resolution	1920 × 1080
	Video frame rate	NTST: 30 fps PAL: 25 fps
Audio parameters	Audio input	Built-in Omnidirectional Microphone
	Audio output	Built-in Loudspeaker
	Audio compression standard	G.711 U
	Audio compression rate	64 Kbps
	Audio quality	Noise Suppression and Echo Cancellation
Access control parameters	Exit button	Exit Button for Opening the Door
	Door magnetic detection	Detects Door Magnetic Status
Light supplement	Light supplement mode	IR Supplement
Network parameters	Ethernet	10/100 Mbps Self-Adaptive Ethernet
	Network protocol	TCP/IP, RTSP
Alarm parameters	Alarm input	Door Magnetic Alarm, Tampering Alarm
Device interfaces	Network interface	Two-Wire Interface
	RS-485	1 RS-485 Half-Duplex Port
	I/O input	2
	I/O output	1-ch 12 VDC Output
General	Material	Stainless Steel
	Power supply	24 VDC, Power Over Network Cable (DS-KAD709)
	Power consumption	≤12 W
	Working temperature	-30 °C to +60 °C (-22 °F to 140 °F)
	Working humidity	10% to 90%

Model		DS-KV8103-IME2
	IP protection level	IP 65
	Dimensions (L x W x H)	169 mm x 110 mm x 44 mm (6.65" x 4.33" x 1.73")


**DS-KH8340-TCE2**
**Specifications**

Model		DS-KH8340-TCE2
System parameter	Processor	High-Performance Embedded SOC Processor
Display parameters	Display screen	7-inch Colorful TFT LCD
	Display resolution	1024 × 600
	Operation method	Capacitive Touch Screen, Touch Button
	Operation interface	Flattened UI Operation Interface
Video parameter	Video compression standard	H.264
Audio parameters	Audio input	Built-in Omnidirectional Microphone
	Audio output	Built-in Loudspeaker
	Audio quality	Noise Suppression and Echo Cancellation
Device interfaces	Network interface	Two-Wire Interface
	RS-485 interface	1, Half-duplex Interface
	Alarm output	1
General	Power supply	Powered by DS-KAD709
	Power consumption	Max. 10 W
	Working temperature	-10 ° C to +55 ° C (14 ° F to 131 ° F)
	Working humidity	10% to 90%
	Installation	Wall Mounting
	Dimension	196 mm × 133 mm × 25.75 mm (7.72" × 5.24" × 1.01")


**DS-KAD709**
**Specifications**

Name	Description
Interface Number	1, 10/100M Interface
Interface Type	9-ch 2-wire Interface
Power Supply	24 VDC
Power Consumption	60 W
Working Temperature	-10 °C to 55 °C
Working Humidity	10% to 90%, No Condensing
Dimensions	112.2 mm x 111 mm x 66 mm (4.42" × 4.37" × 2.60")

## Typical Application

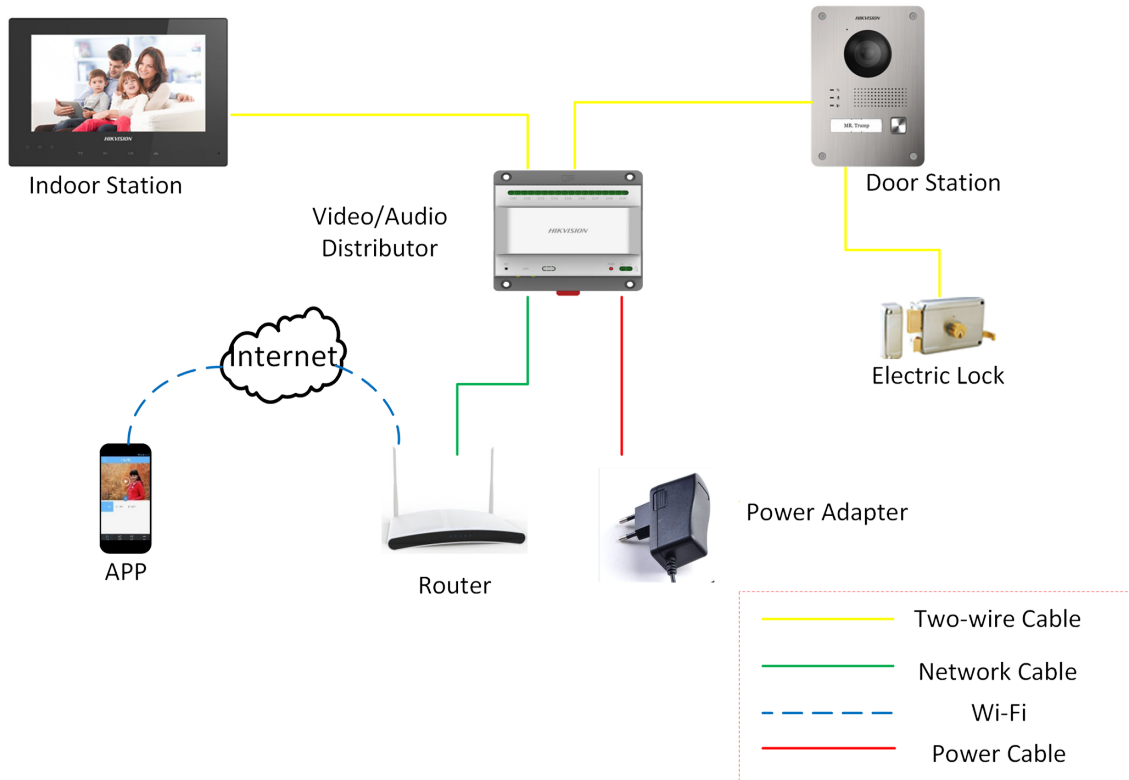

Distributed by

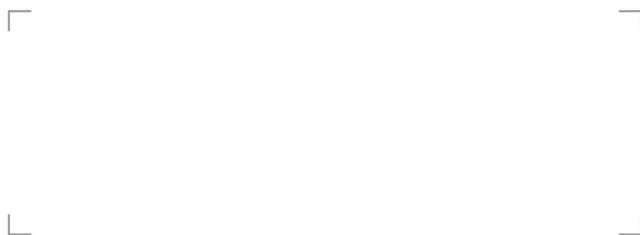

## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com