

EasyIP 3.0

SIMPLE AND POWERFUL
THE EASIER JOURNEY TO BETTER SECURITY
EasyIP 3.0 SOLUTION

THE EasyIP SOLUTION

Video surveillance does not have to be complex. Technological advancements in every corner of our lives is becoming more and more simplified and user friendly. And it's true in security, too.

What makes the best security system? The right components in the right places. And for the small to medium sized business with budget and time restrictions, Hikvision has got the right solution. The Easy IP 3.0 Solution. For those who know the earlier EasyIP versions, this is the go-to, out-of-the-box system. It gets the job done with stable, reliable components and advanced features from the industry's number one worldwide solutions provider.


The EasyIP 3.0 Solution from Hikvision is truly the easier way to better security. Keep reading to see all the benefits EasyIP offers.



In 2012, Hikvision launched the first iteration of the EasyIP Solution, making a significant impact on the industry. EasyIP 1.0 employed the H.264 codec and offered 1.3, 2, and 3 MP cameras. Security professionals around the world took advantage of this cost-effective and easy-to-install system, pleasing many customers.

Hikvision responded to the increased demand for this renowned solution, applying more advanced technologies in 2014. The result was EasyIP 2.0, utilizing the H.264+ codec, and this time offering 2 and 4 MP cameras. More than that, the 2.0 version carried 120 dB Wide Dynamic Range cameras and free cloud service, opening up new possibilities and extending system management. But Hikvision was not finished.


Now, in 2017, the EasyIP 3.0 Solution operates with the H.265+ codec, maximizing resources and taking video surveillance resolution up to 4K! Sharp, vivid imaging during the day is complemented by powerful DarkFighter technology at night. What's more, the 3.0 version provides more VCA functions, extended power-over-Ethernet functionality, and more. The best SMB solution just got better!

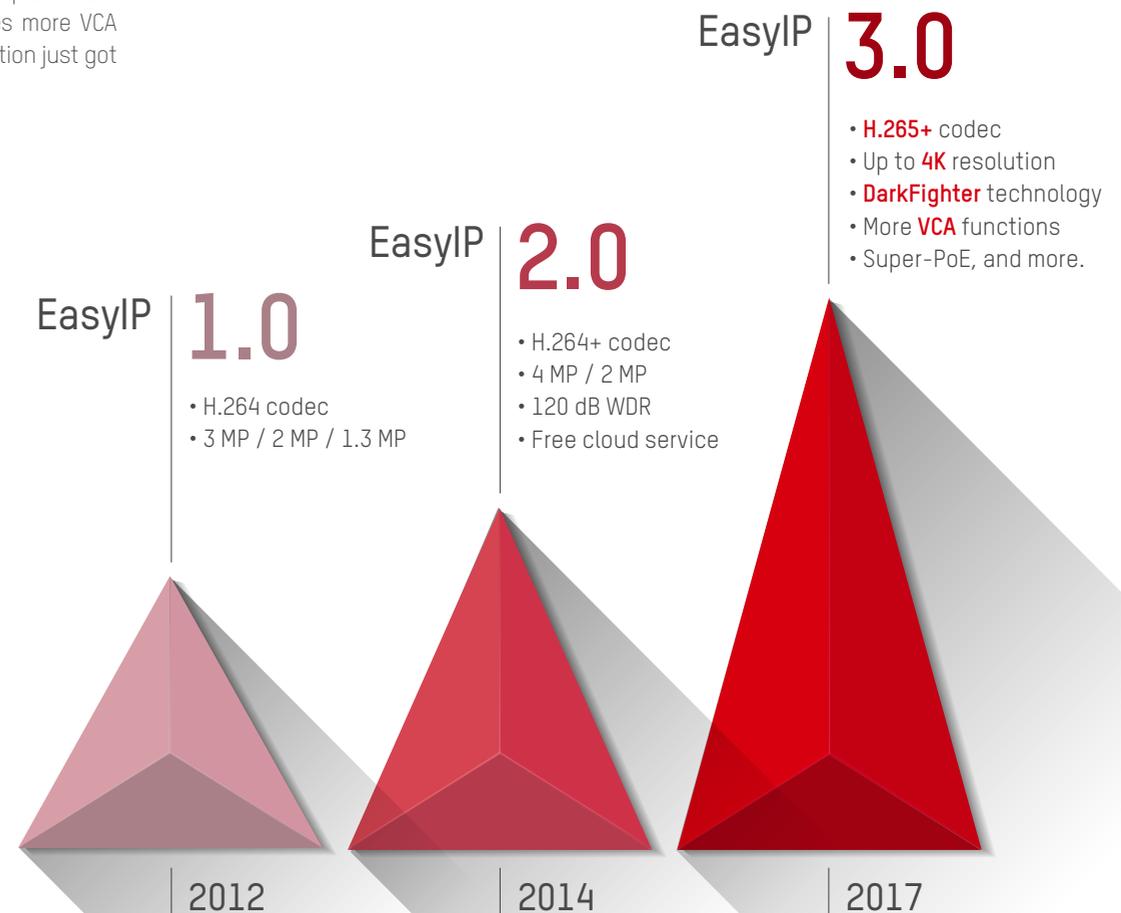


KEY FEATURES

H.265+

If you could cut down bandwidth, decrease data storage requirements, and improve overall system performance with one reliable, advanced codec, you would save time, money, and resources. Why would you say no? Tested and proven, Hikvision's signature compression technology does all this – and more. Boost resolutions to ultra-high 4K and get the most precise imaging available. Here's how it works.

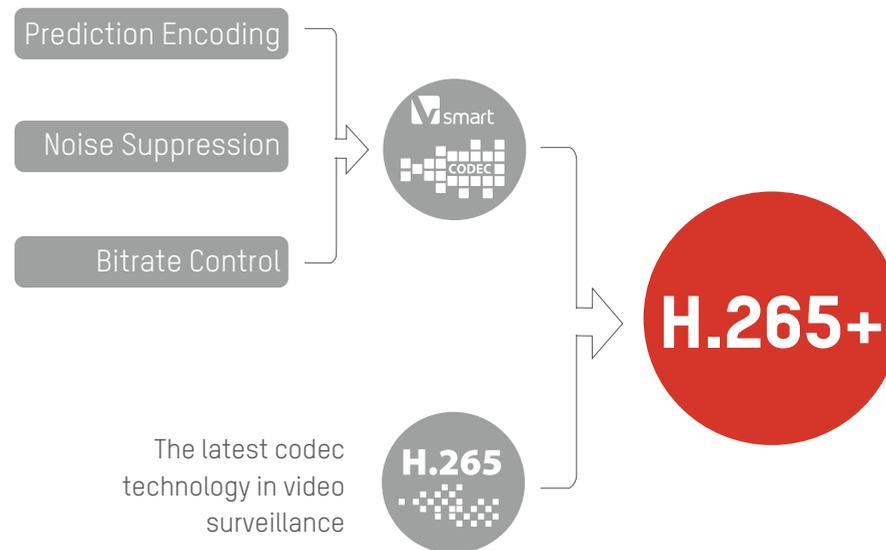


Remarkable reduction of bandwidth and storage

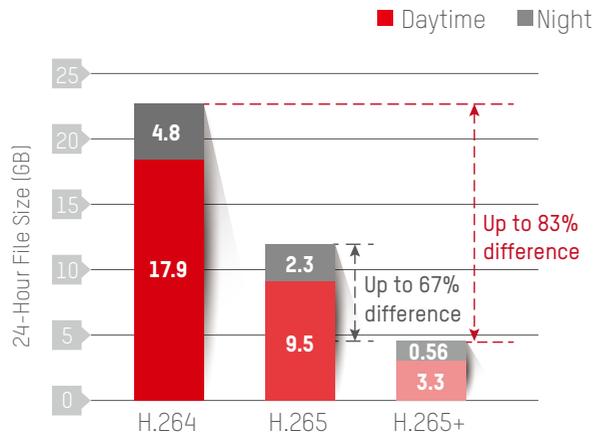

24-Hour recording file size (GB) comparing H.264, H.265, and H.265+

*Data was tested in a common scene; for reference only.

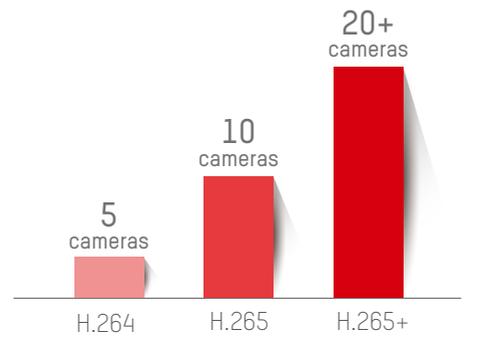


20 MB Broadband Network



Eight 2-MP cameras
5TB HDDs

4K

Recently, ultra-high-definition surveillance cameras introduced 4K resolution to the security industry. However, 4K resolution has yet to achieve wide application, mainly because of the tremendous bandwidth and data storage requirements. The H.265+ codec optimizes data efficiency and makes 4K video surveillance possible. Every pixel comes to life with vivid clarity.

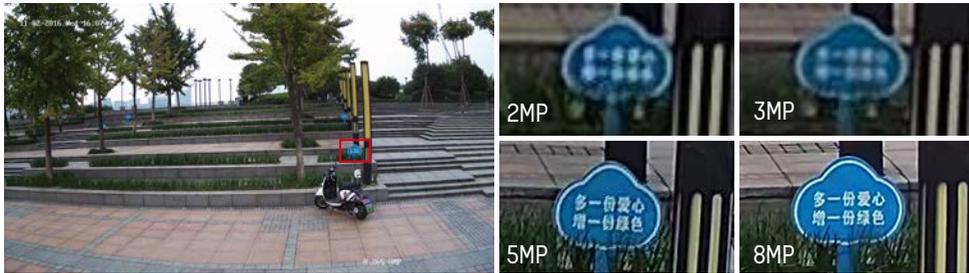


POWERED BY DarkFighter

Turn night into day!
Even faces can be clearly identified.

Better color imaging at night



Captured with an H.264 camera

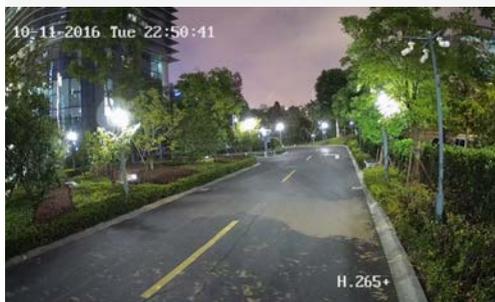

Captured with an EasyIP 3.0 2 MP camera

Capture vivid color in scenes with very weak light



Captured with an H.264 camera



Captured with an EasyIP 3.0 2 MP camera

Color image in a weak-light outdoor scene



Captured with an iPhone7 Plus



Captured with an EasyIP 3.0 2 MP camera

VCA's

Video Content Analytics is no longer reserved only for enterprise level security systems. The EasyIP solution brings VCA's into reach for SMB security, too. Staff can use the Smart Search tool for Alarm event and VCA detection, and the Smart Playback function to replay footage capturing

line-crossing, intrusions, and faces. Alarm triggering and investigation are further enhanced with object removal and unattended baggage detection as well.

More VCA functions improve the system efficiency



Line crossing detection



Intrusion detection



Face detection



Unattended baggage detection



Object removal detection

Network Cameras

Smart Search




Alarm event



VCA detections

NVRs

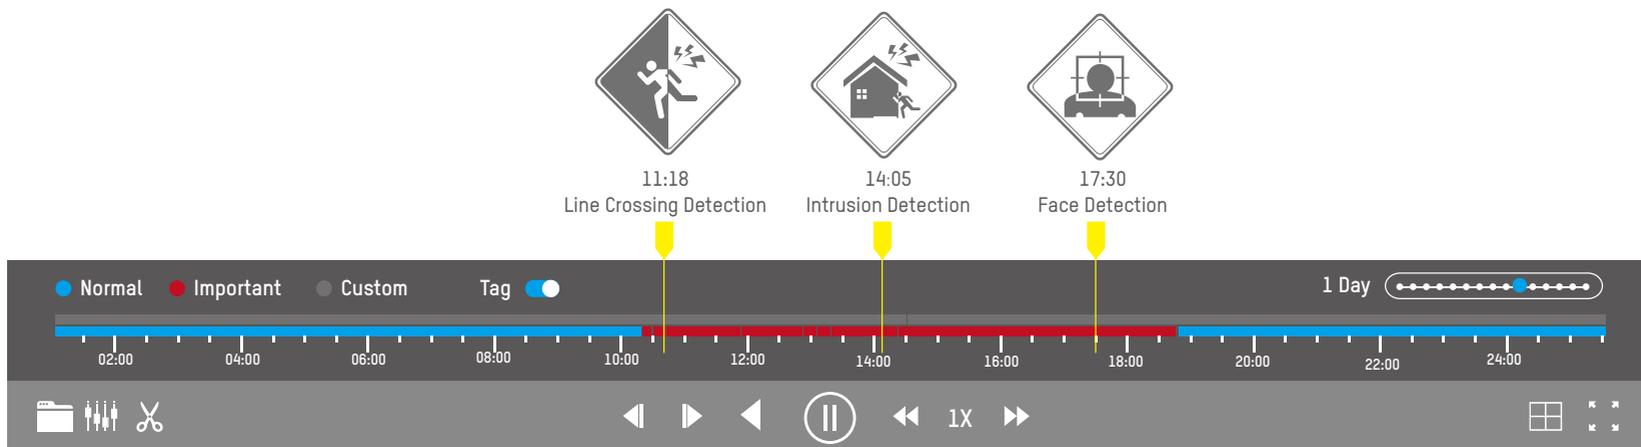

Smart Search and Playback

Super PoE

The EasyIP 3.0 Solution is also the easier way to get better video surveillance to and from the most important locations. While traditional PoE travels only 100 meters, this solution features Super PoE—upgraded power-over-Ethernet—transmitting both power and data over the same cable up to 300 meters (using 802.3af, CAT.6).



Network Cameras



Up to **300 meters**
(802.3af, CAT.6)



NVRs

OTHER FEATURES

Designed for state-of-the-art performance with easier installation, our solution comes armed with reliable components and robust protections. With automatic network backup features and simple Internet connection services, a vigorous security system goes into operation quickly—and stays that way.

● Designed for easier installation

● 120 dB WDR (Wide Dynamic Range)

● EXIR 2.0

● Triple-stream

● On-board storage

● IP67, IP66, & IK10 protection

● ANR (Automatic Network Replenishment)


● Dual system backup (NVR)

● IP address automatic allocation

● Free Hik-connect cloud service

► Designed for easier installation

- Integrated, hidden junction box
- Pluggable interface; no "pigtail" cables

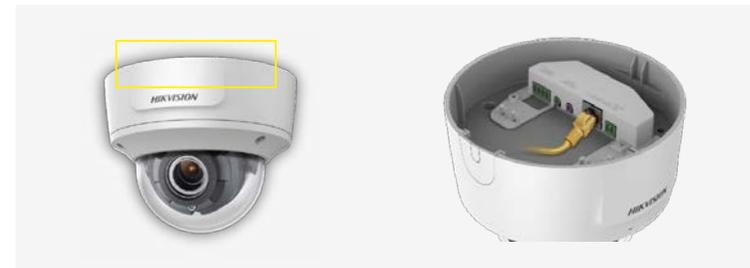

▶ 120 dB Wide Dynamic Range



▶ EXIR 2.0



▶ Automatic Network Replenishment



▶ Dual System Backup (NVRs)

Once NVR does not start up normally under the 1st system, the backup system will take over. It ensures the NVR always can start up with this dual system industry design.



NETWORK CAMERA



Model	DS-2CD2025F(H)WD-I	DS-2CD2125F(H)WD-I(S)	DS-2CD2325F(H)WD-I	DS-2CD2425F(H)WD-I(W)	DS-2CD2525F(H)WD-I(S)
					
Image sensor	1/2.8" Progressive Scan CMOS				
Max. Resolution	1920 × 1080	1920 × 1080	1920 × 1080	1920 × 1080	1920 × 1080
Video Compression	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG
Min. Illumination	Color: 0.005 lux @(F1.2, AGC ON)				
WDR	120dB	120dB	120dB	120dB	120dB
Lens	2.8mm/4mm/6mm	2.8mm/4mm	2.8mm/4mm/6mm	2.8 mm	2.8mm/4mm/6mm/12mm
FOV	108°/86.4°/52°	108°/86.4°	108°/86.4°/52°	108°	108°/86.4°/52°/25°
IR Range	Up to 30 m	Up to 30 m	Up to 30 m	Up to 10 m	Up to 10 m
VCA	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection
Frame Rate	Main stream up to 50/60fps(H) 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)	Main stream up to 50/60fps(H) 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)	Main stream up to 50/60fps(H) 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)	Main stream up to 50/60fps(H) 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)	Main stream up to 50/60fps(H) 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)
Multi-streaming	3 streams				
Ingress Protection	IP67	IP67, IK10	IP67	---	IP67, IK10
Angle Adjustment	Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°	Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°	Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360°	Pan: 0° to 360°, tilt: 0° to 90°	Pan: -30° to +30°, tilt: 0° to 75°, rotate: 0° to 360°
Working Temperature	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-10 °C to +40°C (14 °F to 104 °F)	-30 °C to +60 °C (-22 °F to +140 °F)
Humidity	Humidity 95% or less (---condensing)				
On-board Storage	Built-in microSD/SDHC/SDXC slot, up to 128 GB				
Audio I/O	---	1/1(-S)	---	Build-in mic., Build-in speaker	Build-in mic., 1 output (line out)
Alarm I/O	---	1/1(-S)	---	1/1	1/1
Power Supply	DC 12V ± 25%, PoE(802.3af)				

Model	DS-2CD2T25F(H)WD-I/18	DS-2CD2035FWD-I	DS-2CD2135FWD-I(S)	DS-2CD2335FWD-I	DS-2CD2435FWD-I(W)
	 2MP	 3MP	 3MP	 3MP	 3MP
Image sensor	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS
Max. Resolution	1920 × 1080	2048 × 1536	2048 × 1536	2048 × 1536	2048 × 1536
Video Compression	H.265+ /H.265/H.264+ /H.264/MJPEG	H.265+ /H.265/H.264+ /H.264/MJPEG	H.265+ /H.265/H.264+ /H.264/MJPEG	H.265+ /H.265/H.264+ /H.264/MJPEG	H.265+ /H.265/H.264+ /H.264/MJPEG
Min. Illumination	Color: 0.005 lux @(F1.2, AGC ON)	Color: 0.005 lux @(F1.2, AGC ON)	Color: 0.005 lux @(F1.2, AGC ON)	Color: 0.005 lux @(F1.2, AGC ON)	Color: 0.005 lux @(F1.2, AGC ON)
WDR	120dB	120dB	120dB	120dB	120dB
Lens	2.8mm/4mm/6mm/12mm/16mm	2.8mm/4mm/6mm	2.8mm/4mm	2.8mm/4mm/6mm	2.8 mm
FOV	108°/86.4°/52°/25°/20°	98°/78.7°/48°	98°/78.7°	98°/78.7°/48°	98°
IR Range	I5: Up to 50 m I8: up to 80 m	Up to 30 m	Up to 30 m	Up to 30 m	Up to 10 m
VCA	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection
Frame Rate	Main stream up to 50/60fps(H) 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)	Main stream up to 50/60fps(H) 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)	Main stream up to 50/60fps(H) 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)	Main stream 50Hz: 25fps (2048 × 1536, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2048 × 1536, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 25fps (2048 × 1536, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2048 × 1536, 1920 × 1080, 1280 × 720)
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams
Ingress Protection	IP67	IP67	IP67, IK10	IP67	---
Angle Adjustment	Pan: 0° to 360°, tilt: 0° to 100°, rotate: 0° to 360°	Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°	Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°	Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360°	Pan: 0° to 360°, tilt: 0° to 90°
Working Temperature	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-10 °C to +40 °C (14 °F to 104 °F)
Humidity	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)
On-board Storage	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB
Audio I/O	---	---	1/1(-S)	---	Build-in mic., Build-in speaker
Alarm I/O	---	---	1/1(-S)	---	1/1
Power Supply	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)

Model	DS-2CD2535FWD-I(S)	DS-2CD2T35FWD-I5/I8	DS-2CD2055FWD-I	DS-2CD2155FWD-I(S)	DS-2CD2355FWD-I
	 3MP	 3MP	 5MP	 5MP	 5MP
Image sensor	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS
Max. Resolution	2048 × 1536	2048 × 1536	2560 × 1920	2560 × 1920	2560 × 1920
Video Compression	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG
Min. Illumination	Color: 0.005 lux @(F1.2, AGC ON)	Color: 0.005 lux @(F1.2, AGC ON)	Color: 0.01 lux @(F1.2, AGC ON)	Color: 0.01 lux @(F1.2, AGC ON)	Color: 0.01 lux @(F1.2, AGC ON)
WDR	120dB	120dB	120dB	120dB	120dB
Lens	2.8 mm	2.8mm/4mm/6mm/12mm/16mm	2.8mm/4mm/6mm	2.8mm/4mm	2.8mm/4mm/6mm/8mm
FOV	98°	98°/78.7°/48°/18°	81°/63.5°/50°	81°/63.5°	81°/63.5°/50°/33°
IR Range	Up to 10 m	I5: Up to 50 m I8: up to 80 m	Up to 30 m	Up to 30 m	Up to 30 m
VCA	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection
Frame Rate	Main stream 50Hz: 25fps (2048 × 1536, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2048 × 1536, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 25fps (2048 × 1536, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2048 × 1536, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 20 fps (2560 × 1920), 25 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (2560 × 1920), 30 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 20 fps (2560 × 1920), 25 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (2560 × 1920), 30 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 20 fps (2560 × 1920), 25 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (2560 × 1920), 30 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720)
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams
Ingress Protection	IP67, IK10	IP67	IP67	IP67, IK10	IP67
Angle Adjustment	Pan: -30° to +30°, tilt: 0° to 75°, rotate: 0° to 360°	Pan: 0° to 360°, tilt: 0° to 100°, rotate: 0° to 360°	Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°	Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°	Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360°
Working Temperature	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)
Humidity	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)
On-board Storage	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB
Audio I/O	Built-in mic., 1 output (line out)	---	---	1/1(-S)	---
Alarm I/O	1/1	---	---	1/1(-S)	---
Power Supply	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)

Model	DS-2CD2455FWD-I(W)	DS-2CD2555FWD-I(S)	DS-2CD2T55FWD-I5/I8	DS-2CD2085FWD-I	DS-2CD2185FWD-I(S)
	 5MP	 5MP	 5MP	 8MP	 8MP
Image sensor	1/2.9" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS	1/2.5" Progressive Scan CMOS	1/2.5" Progressive Scan CMOS
Max. Resolution	2560 × 1920	2560 × 1920	2560 × 1920	3840 × 2160	3840 × 2160
Video Compression	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG
Min. Illumination	Color: 0.01 lux @(F1.2, AGC ON)				
WDR	120dB	120dB	120dB	120dB	120dB
Lens	2.8 mm	2.8 mm	2.8mm/4mm/6mm/12mm/16mm	2.8mm/4mm/6mm	2.8mm/4mm
FOV	81°	81°	81°/63.5°/50° 12 mm 16 mm	102°/78°/50°	102°/78°
IR Range	up to 10 m	up to 10 m	I5: Up to 50 m I8: up to 80 m	Up to 30 m	Up to 30 m
VCA	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection
Frame Rate	Main stream 50Hz: 20 fps (2560 × 1920), 25 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (2560 × 1920), 30 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 20 fps (2560 × 1920), 25 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (2560 × 1920), 30 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 20 fps (2560 × 1920), 25 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (2560 × 1920), 30 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 20 fps (3840 × 2160), 25 fps (2560 × 1920, 2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (3840 × 2160), 30 fps (2560 × 1920, 2560 × 1440, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 20 fps (3840 × 2160), 25 fps (2560 × 1920, 2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (3840 × 2160), 30 fps (2560 × 1920, 2560 × 1440, 1920 × 1080, 1280 × 720)
Multi-streaming	3 streams				
Ingress Protection	---	IP67, IK10	IP67	IP67	IP67, IK10
Angle Adjustment	Pan: 0° to 360°, tilt: 0° to 90°	Pan: -30° to +30°, tilt: 0° to 75°, rotate: 0° to 360°	Pan: 0° to 360°, tilt: 0° to 100°, rotate: 0° to 360°	Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°	Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°
Working Temperature	-10 °C to +40°C (14 °F to 104 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)
Humidity	Humidity 95% or less (---condensing)				
On-board Storage	Built-in microSD/SDHC/SDXC slot, up to 128 GB				
Audio I/O	Build-in mic., Build-in speaker	Build-in mic., 1 output (line out)	---	---	1/1(-S)
Alarm I/O	1/1	1/1	---	---	1/1(-S)
Power Supply	DC 12V ± 25%, PoE(802.3af)				

Model	DS-2CD2385FWD-I	DS-2CD2485FWD-I(W)	DS-2CD2T85FWD-IS/I8	DS-2CD2H25FWD-IZ(S)	DS-2CD2H35FWD-IZ(S)
	 8MP	 8MP	 8MP		
Image sensor	1/2.5" Progressive Scan CMOS	1/2.5" Progressive Scan CMOS	1/2.5" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS
Max. Resolution	3840 × 2160	3840 × 2160	3840 × 2160	1920 × 1080	2048 × 1536
Video Compression	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG
Min. Illumination	Color: 0.01 lux @(F1.2, AGC ON)	Color: 0.01 lux @(F1.2, AGC ON)	Color: 0.01 lux @(F1.2, AGC ON)	Color: 0.005 lux @(F1.2, AGC ON)	Color: 0.005 lux @(F1.2, AGC ON)
WDR	120dB	120dB	120dB	120dB	120dB
Lens	2.8mm/4mm/6mm	2.8 mm	2.8mm/4mm/6mm/12mm/16mm	2.8-12mm	2.8-12mm
FOV	102°/78°/50°	102°	81°/63.5°/50° 12 mm 16 mm	---	---
IR Range	Up to 30 m	Up to 10 m	I5: Up to 50 m I8: up to 80 m	Up to 30 m	Up to 30 m
VCA	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection
Frame Rate	Main stream 50Hz: 20 fps (3840 × 2160), 25 fps (2560 × 1920, 2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (3840 × 2160), 30 fps (2560 × 1920, 2560 × 1440, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 20 fps (3840 × 2160), 25 fps (2560 × 1920, 2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (3840 × 2160), 30 fps (2560 × 1920, 2560 × 1440, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 20 fps (3840 × 2160), 25 fps (2560 × 1920, 2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (3840 × 2160), 30 fps (2560 × 1920, 2560 × 1440, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)	Main stream 50Hz: 25fps (2048 × 1536, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2048 × 1536, 1920 × 1080, 1280 × 720)
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams
Ingress Protection	IP67	---	IP67	IP67	IP67
Angle Adjustment	Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360°	Pan: 0° to 360°, tilt: 0° to 90°	Pan: 0° to 360°, tilt: 0° to 100°, rotate: 0° to 360°	Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360°	Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360°
Working Temperature	-30 °C to +60 °C (-22 °F to +140 °F)	-10 °C to +40°C (14 °F to 104 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)
Humidity	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)
On-board Storage	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB
Audio I/O	---	Build-in mic., Build-in speaker	---	1/1(-S)	1/1(-S)
Alarm I/O	---	1/1	---	1/1(-S)	1/1(-S)
Power Supply	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)

Model	DS-2CD2625FWD-IZ(S) 	DS-2CD2635FWD-IZ(S) 	DS-2CD2725FWD-IZ(S) 	DS-2CD2735FWD-IZ(S) 	DS-2CD2H55FWD-IZ(S) 
Image sensor	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/2.5" Progressive Scan CMOS
Max. Resolution	1920 × 1080	2049 × 1536	1920 × 1080	2049 × 1536	2560 × 1920
Video Compression	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.265/MJPEG	H.265+/H.265/H.264+/H.265/MJPEG
Min. Illumination	Color: 0.005 lux @(F1.2, AGC ON)	Color: 0.005 lux @(F1.2, AGC ON)	Color: 0.005 lux @(F1.2, AGC ON)	Color: 0.005 lux @(F1.2, AGC ON), 1 lux with IR	Color: 0.01 lux @(F1.2, AGC ON)
WDR	120dB	120dB	120dB	120dB	120dB
Lens	2.8-12mm	2.8-12mm	2.8-12mm	2.8-12mm	2.8-12mm
FOV	110° to 33°	110° to 33°	110° to 33°	110° to 33°	---
IR Range	Up to 50 m	Up to 50 m	Up to 30 m	Up to 30 m	Up to 30 m
VCA	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection
Frame Rate	Main stream 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)	Main stream 50Hz: 25fps (2048 × 1536, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2048 × 1536, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)	Main stream 50Hz: 25fps (2048 × 1536, 1920 × 1080, 1280 × 720) 60Hz: 30fps (2048 × 1536, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 20 fps (2560 × 1920), 25 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (2560 × 1920), 30 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720)
Multi-streaming	3 streams	3 streams	3 streams	3 streams	3 streams
Ingress Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10	IP67
Angle Adjustment	Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°	Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°	Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°	Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°	Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360°
Working Temperature	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)
Humidity	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)
On-board Storage	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB
Audio I/O	1/1(-S)	1/1(-S)	1/1(-S)	1/1(-S)	1/1(-S)
Alarm I/O	1/1(-S)	1/1(-S)	1/1(-S)	1/1(-S)	1/1(-S)
Power Supply	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)

Model	DS-2CD2H85FWD-IZ(S)	DS-2CD2655FWD-IZ(S)	DS-2CD2685FWD-IZ(S)	DS-2CD2755FWD-IZ(S)	DS-2CD2785FWD-IZ(S)
					
Image sensor	1/2.5" Progressive Scan CMOS				
Max. Resolution	3840 × 2160	2560 × 1920	3840 × 2160	2560 × 1920	3840 × 2160
Video Compression	H.265+/H.265/H.264+/H.265/MJPEG	H.265+/H.265/H.264+/H.265/MJPEG	H.265+/H.265/H.264+/H.265/MJPEG	H.265+/H.265/H.264+/H.265/MJPEG	H.265+/H.265/H.264+/H.265/MJPEG
Min. Illumination	Color: 0.01 lux @(F1.2, AGC ON)				
WDR	120dB	120dB	120dB	120dB	120dB
Lens	2.8-12mm	2.8-12mm	2.8-12mm	2.8-12mm	2.8-12mm
FOV	---	110° to 33°	110° to 33°	110° to 33°	110° to 33°
IR Range	Up to 30 m	Up to 50 m	Up to 50 m	Up to 30 m	Up to 30 m
VCA	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection	Line crossing detection, intrusion detection, object removal detection, unattended baggage detection, face detection
Frame Rate	Main stream 50Hz: 20 fps (3840 × 2160), 25 fps (2560 × 1920, 2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (3840 × 2160), 30 fps (2560 × 1920, 2560 × 1440, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 20 fps (2560 × 1920), 25 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (2560 × 1920), 30 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 20 fps (3840 × 2160), 25 fps (2560 × 1920, 2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (3840 × 2160), 30 fps (2560 × 1920, 2560 × 1440, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 20 fps (2560 × 1920), 25 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (2560 × 1920), 30 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720)	Main stream 50Hz: 20 fps (3840 × 2160), 25 fps (2560 × 1920, 2560 × 1440, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (3840 × 2160), 30 fps (2560 × 1920, 2560 × 1440, 1920 × 1080, 1280 × 720)
Multi-streaming	3 streams				
Ingress Protection	IP67	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Angle Adjustment	Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360°	Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°	Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°	Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°	Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°
Working Temperature	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)	-30 °C to +60 °C (-22 °F to +140 °F)
Humidity	Humidity 95% or less (---condensing)				
On-board Storage	Built-in microSD/SDHC/SDXC slot, up to 128 GB				
Audio I/O	1/1(-S)	1/1(-S)	1/1(-S)	1/1(-S)	1/1(-S)
Alarm I/O	1/1(-S)	1/1(-S)	1/1(-S)	1/1(-S)	1/1(-S)
Power Supply	DC 12V ± 25%, PoE(802.3af)				

	DS-2CD2935FWD-I(S)	DS-2CD2955FWD-I(S)
Model		
Image sensor	1/2.8" Progressive Scan CMOS	1/2.5" Progressive Scan CMOS
Max. Resolution	2048 × 1536	2560 × 1920
Video Compression	H.265+/H.265/MJPEG	H.265+/H.265/MJPEG
Min. Illumination	Color: 0.005Lux @ (F1.2, AGC ON)	Color: 0.005Lux @ (F1.2, AGC ON)
WDR	120dB	120dB
Lens	1.16mm	1.16mm
FOV	horizontal field of view: 180°, vertical field of view: 180°	horizontal field of view: 180°, vertical field of view: 180°
IR Range	Up to 15 m	Up to 15 m
VCA	Motion Detection, DyN/Amic AN/Alysis, Intrusion Detection, Line Crossing Detection	Motion Detection, DyN/Amic AN/Alysis, Intrusion Detection, Line Crossing Detection
Frame Rate	Main stream 50Hz: 25fps (2048 × 1536, 1600 × 1200, 1280 × 960) 60Hz: 30fps (2048 × 1536, 1600 × 1200, 1280 × 960)	Main stream 50Hz: 25fps (2048 × 1536, 1600 × 1200, 1280 × 960) 60Hz: 30fps (2048 × 1536, 1600 × 1200, 1280 × 960)
Multi-streaming	2 streams	2 streams
Ingress Protection	---	---
Angle Adjustment	---	---
Working Temperature	-10 °C to +50 °C (-14 °F to +122 °F)	-10 °C to +50 °C (-14 °F to +122 °F)
Humidity	Humidity 95% or less (---condensing)	Humidity 95% or less (---condensing)
On-board Storage	Built-in microSD/SDHC/SDXC slot, up to 128 GB	Built-in microSD/SDHC/SDXC slot, up to 128 GB
Audio I/O	1/1(-S)	1/1(-S)
Alarm I/O	1/1(-S)	1/1(-S)
Power Supply	DC 12V ± 25%, PoE(802.3af)	DC 12V ± 25%, PoE(802.3af)

NETWORK PTZ CAMERA



Model	DS-2DE4A220IW	DS-2DE4A320IW	DS-2DE4A204IW	DS-2DY3220IW	DS-2DY3320IW
					
Image Sensor	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/1.9" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS
Max. Image Resolution	1920 × 1080	2048 × 1536	1920 × 1080	1920 × 1080	2048 × 1536
Image Compression	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG
Focal Length	4.7 to 94mm, 20× Optical	4.7 to 94mm, 20× Optical	2.8 to 12mm, 4× Optical	4.7-94mm, 20X	4.7-94mm, 20X
Angle of View	61.4° to 2.9° (wide-tele)	58.3° to 3.2° (wide-tele)	90.1° to 31° (wide-tele)	58.3°-3.2°(Wide-Tele)	58.3°-3.2°(Wide-Tele)
Min. Illumination	Color: 0.05 Lux @ (F1.6, AGC ON) B/W: 0.01 Lux @ (F1.6, AGC ON) 0 Lux with IR	Color: 0.05 Lux @ (F1.6, AGC ON) B/W: 0.01 Lux @ (F1.6, AGC ON) 0 Lux with IR	Color: 0.002 Lux @ (F1.6, AGC ON) B/W: 0.0002Lux @ (F1.6, AGC ON) 0 Lux with IR	Color: 0.05 Lux @ (F1.6, AGC ON), B/W: 0.005Lux @ (F1.6, AGC ON), 0 Lux with IR	Color: 0.05 Lux @ (F1.6, AGC ON), B/W: 0.005Lux @ (F1.6, AGC ON), 0 Lux with IR
WDR	Support	Support	Support	Support	Support
IR Distance	Up to 50m	Up to 50m	Up to 50m	Up to 100m	Up to 100m
VCA	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection
Frame rate	Main stream: 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720), 50fps (1920 × 1080, 1280 × 960, 1280 × 720); 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720), 60fps (1920 × 1080, 1280 × 960, 1280 × 720)	Main stream: 50Hz: 25fps (2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720), 50fps (1920 × 1080, 1280 × 960, 1280 × 720); 60Hz: 30fps (2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720), 60fps (1920 × 1080, 1280 × 960, 1280 × 720)	Main stream: 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720), 50fps (1920 × 1080, 1280 × 960, 1280 × 720); 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720), 60fps (1920 × 1080, 1280 × 960, 1280 × 720)	Main Stream: 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720), 50fps (1280 × 960, 1280 × 720); 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720), 60fps (1280 × 960, 1280 × 720)	Main Stream: 50Hz: 25fps (2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720), 50fps (1280 × 960, 1280 × 720); 60Hz: 30fps (2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720), 60fps (1280 × 960, 1280 × 720)
Multi-Stream	Three	Three	Three	Three	Three
Protection Level	IP66	IP66	IP66	IP66	IP66
Pan/tilt range	Pan: 360° endless; Tilt: -5°-90°(Auto Flip)	Pan: 360° endless; Tilt: -5°-90°(Auto Flip)	Pan: 360° endless; Tilt: -5°-90°(Auto Flip)	-D4: Pan: 360°endless, Tilt: -40°~ 30°; -D: Tilt: -40°~ -20°, Pan: 0°~ 120°S 240°~360°; Tilt: -20°~ 30°, Pan: 360°endless	-D4: Pan: 360°endless, Tilt: -40°~ 30°; -D: Tilt: -40°~ -20°, Pan: 0°~ 120°S 240°~360°; Tilt: -20°~ 30°, Pan: 360°endless
Pan/tilt Speed	Configurable, from 0.1°/s to 300°/s Preset Speed: 350°/s; Configurable, from 0.1°/s to 160°/s Preset Speed: 200°/s	Configurable, from 0.1°/s to 300°/s Preset Speed: 350°/s; Configurable, from 0.1°/s to 160°/s Preset Speed: 200°/s	Configurable, from 0.1°/s to 300°/s Preset Speed: 350°/s; Configurable, from 0.1°/s to 160°/s Preset Speed: 200°/s	Pan: 0.1°-60°/s, Tilt: 0.1°-30°/s	Pan: 0.1°-60°/s, Tilt: 0.1°-30°/s
Working Temperature	-30°C to 65°C (-22°F to 149°F)	-30°C to 65°C (-22°F to 149°F)	-30°C to 65°C (-22°F to 149°F)	-30 °C ~ 65 °C (Outdoor)	-30 °C ~ 65 °C (Outdoor)
Humidity	90% or less	90% or less	90% or less	90% or less	90% or less
Mini SD Memory Card	Support up to 128GB Micro SD/SDHC/SDXC card	Support up to 128GB Micro SD/SDHC/SDXC card	Support up to 128GB Micro SD/SDHC/SDXC card	Support up to 128GB Micro SD/SDHC/SDXC card	Support up to 128GB Micro SD/SDHC/SDXC card
Audio I/O	1-ch audio in/1-ch audio out	1-ch audio in/1-ch audio out	1-ch audio in/1-ch audio out	1-ch audio in/1-ch audio out	1-ch audio in/1-ch audio out
Alarm I/O	2-ch alarm in/2-ch alarm out	2-ch alarm in/2-ch alarm out	2-ch alarm in/2-ch alarm out	1-ch alarm in/1-ch alarm out	1-ch alarm in/1-ch alarm out
Power	DC 12V and PoE (802.3at, class4) Max.: 18W (IR light 5W Max.)	DC 12V and PoE (802.3at, class4) Max.: 18W (IR light 5W Max.)	DC 12V and PoE (802.3at, class4) Max.: 18W (IR light 5W Max.)	DC 12V, MAX. 19W	DC 12V, MAX. 19W

Model	DS-2DY5223IW-AE	DS-2DE7530IW	DS-2DE7430IW	DS-2DE7420IW	DS-2DE7230IW
					
4.7 to 94mm, 20× Optical	1/1.9" Progressive Scan CMOS	1/1.9" Progressive Scan CMOS	1/1.9" Progressive Scan CMOS	1/1.9" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS
Max. Image Resolution	1920 x 1080	2592 × 1944	2560 × 1536	2560 × 1536	1920 × 1080
Image Compression	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG
Focal Length	5.9-135.7mm, 23X	5.9 mm to 177 mm	5.9 mm to 177 mm	5.9 mm to 118 mm	4.3-129.0mm, 30x
Angle of View	59.8°-3.0°(Wide-Tele)	51.3° to 2.7°	48.8° to 2.3°	48.8° to 3.5°	65.5-2.11degree (Wide-Tele)
Min. Illumination	Color: 0.002Lux @(F1.5, AGC ON), B/W:0.0002Lux @(F1.5, AGC ON)	Color: 0.005 Lux @(F1.5, AGC ON) B/W: 0.002 Lux @(F1.5, AGC ON) 0 Lux with IR	Color: 0.005 Lux @(F1.5, AGC ON) B/W: 0.002 Lux @(F1.5, AGC ON) 0 Lux with IR	Color: 0.005 Lux @(F1.5, AGC ON) B/W: 0.002 Lux @(F1.5, AGC ON) 0 Lux with IR"	F1.6, AGC On: Color: 0.05 lux, B/W : 0.01lux, 0 lux with IR
WDR	Support	Support	Support	Support	Support
IR Distance	Up to 150m	Up to 150m	Up to 150m	Up to 150m	Up to 150m
VCA	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection
Frame rate	Main Stream: 50Hz:25fps(1920×1080), 25fps(1280×720) 60Hz:30fps(1920×1080), 30fps(1280×720)	50Hz: 25fps (2592 × 1944, 2560 × 1536, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (2592 × 1944, 2560 × 1536, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720)	50Hz: 25fps (2592 × 1944, 2560 × 1536, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (2592 × 1944, 2560 × 1536, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720)	50Hz: 25fps (2592 × 1944, 2560 × 1536, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (2592 × 1944, 2560 × 1536, 2048 × 1536, 1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720)	Main stream: 50Hz: 25fps (1920 × 1080, 1280×960, 1280×720), 50fps (1280×960, 1280×720) ; 60Hz: 30fps(1920 × 1080, 1280×960, 1280×720), 60fps (1280×960, 1280×720)
Multi-Stream	Two	Three	Three	Three	Three
Protection Level	IP66	IP66	IP66	IP66	IP66
Pan/tilt range	Pan: 360° endless, Tilt: +90°--90°	Pan:360° endless; Tilt: -15°-90°(Auto Flip)	Pan:360° endless; Tilt: -15°-90°(Auto Flip)	Pan: 360° endless; Tilt: -15°-90°(Auto Flip)	Pan: 360° endless; Tilt: -15°-90°(Auto Flip)
Pan/tilt Speed	Pan: 0.1°-200°/s, Tilt: 0.1°-50°/s	Pan Manual Speed: 0.1°-160°/s, Pan Preset Speed: 240°/s; Tilt Manual Speed: 0.1°-120°/s, Tilt Preset Speed: 200°/s	Pan Manual Speed: 0.1°-160°/s, Pan Preset Speed: 240°/s; Tilt Manual Speed: 0.1°-120°/s, Tilt Preset Speed: 200°/s	Pan Manual Speed: 0.1°-160°/s, Pan Preset Speed: 240°/s; Tilt Manual Speed: 0.1°-120°/s, Tilt Preset Speed: 200°/s	Pan Manual Speed: 0.1°-160°/s, Pan Preset Speed: 240°/s; Tilt Manual Speed: 0.1°-120°/s, Tilt Preset Speed: 200°/s
Working Temperature	-40°C ~ 65°C	-30°C ~ 65°C [-22°F ~ 149°F]	-30°C ~ 65°C [-22°F ~ 149°F]	-30°C ~ 65°C [-22°F ~ 149°F]	-30°C ~ 65°C [-22°F ~ 149°F]
Humidity	90% or less	90% or less	90% or less	90% or less	90% or less
Mini SD Memory Card	Support up to 128GB Micro SD/SDHC/SDXC card	Support up to 128GB Micro SD/SDHC/SDXC card	Support up to 128GB Micro SD/SDHC/SDXC card	Support up to 128GB Micro SD/SDHC/SDXC card	Support up to 128GB Micro SD/SDHC/SDXC card
Audio I/O	1-ch audio in/1-ch audio out	1-ch audio in/1-ch audio out	1-ch audio in/1-ch audio out	1-ch audio in/1-ch audio out	1-ch audio in/1-ch audio out
Alarm I/O	7-ch alarm in/2-ch alarm out	2-ch alarm in/1-ch alarm out	2-ch alarm in/1-ch alarm out	2-ch alarm in/1-ch alarm out	2-ch alarm in/1-ch alarm out
Power	Hi-PoES24 VAC, Max. 45W	High-PoES24 VAC, Max.40W	High-PoES24 VAC, Max.40W	High-PoES24 VAC, Max.40W	High-PoES24 VAC, Max.40W

Model	DS-2DE7220IW 	DS-2DE7330IW 	DS-2DE7320IW 	DS-2DE5220IW 	DS-2DE5230W 
Image Sensor	1/2.8" Progressive Scan CMOS	1/2.8" progressive scan CMOS	1/2.8" progressive scan CMOS	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS
Max. Image Resolution	1920 × 1080	2048 × 1536	2048 × 1536	1920 × 1080	1920 × 1080
Image Compression	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG
Focal Length	4.3-94.0mm, 20x	4.3 to 129mm, 30× Optical	4.7 to 94mm, 20× Optical	4.7-94mm, 20x	4.3-129mm, 30x
Angle of View	61.4-2.9 degree (Wide-Tele)	57.4 - 2.8 degree (wide-tele)	58.3- 3.2 degree (wide-tele)	61.4-2.9 degree (Wide-Tele)	65.5-2.11 degree (Wide-Tele)
Min. Illumination	F1.6, AGC On: Color: 0.05 lux, B/W : 0.01lux, 0 lux with IR	Color: 0.05 Lux @ (F1.6, AGC ON), B/W: 0.01Lux @ (F1.6, AGC ON) IR: 0 Lux	Color: 0.05 Lux @ (F1.6, AGC ON), B/W: 0.01Lux @ (F1.6, AGC ON) IR: 0 Lux	F1.6, AGC On: Color: 0.05 lux, B/W : 0.01 lux	0.05Lux @ (F1.6, AGC ON), B/W: 0.01Lux @ (F1.6, AGC ON)
WDR	Support	Support	Support	Support	Support
IR Distance	Up to 150m	Up to 150m	Up to 150m	Up to 150m	--
VCA	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection
Frame rate	Main stream: 50Hz: 25fps (1920 × 1080,1280×960,1280×720), 50fps (1280×960,1280×720) ; 60Hz: 30fps(1920 × 1080,1280×960,1280×720), 60fps (1280×960,1280×720)	Main stream: 50Hz: 25fps (2048×1536,1920 × 1080,1280×960,1280×720), 50fps (1280×960,1280×720) ; 60Hz: 30fps(2048×1536,1920 × 1080,1280×960,1280×720), 60fps (1280×960,1280×720)	Main stream: 50Hz: 25fps (2048×1536,1920 × 1080,1280×960,1280×720), 50fps (1280×960,1280×720) ; 60Hz: 30fps(2048×1536,1920 × 1080,1280×960,1280×720), 60fps (1280×960,1280×720)	Main stream: 50Hz: 25fps (1920 × 1080,1280×960,1280×720), 50fps (1280×960,1280×720) ; 60Hz: 30fps(1920 × 1080,1280×960,1280×720), 60fps (1280×960,1280×720)	Main stream: 50Hz: 25fps (1920 × 1080,1280×960,1280×720), 50fps (1280×960,1280×720) ; 60Hz: 30fps(1920 × 1080,1280×960,1280×720), 60fps (1280×960,1280×720)
Multi-Stream	Three	Three	Three	Three	Three
Protection Level	IP66	IP66	IP66	IP66	IP66
Pan/tilt range	Pan: 360° endless; Tilt: -15°-90°(Auto Flip)	Pan: 360° endless; Tilt: -15°-90°(Auto Flip)	Pan: 360° endless; Tilt: -15°-90°(Auto Flip)	Pan: 360° endless; Tilt: -5°-90°(Auto Flip)	Pan: 360° endless; Tilt: -5°-90°(Auto Flip)
Pan/tilt Speed	Pan Manual Speed: 0.1°-160°/s, Pan Preset Speed: 240°/s; Tilt Manual Speed: 0.1°-120°/s, Tilt Preset Speed: 200°/s	Configurable, from 0.1°/s to 160°/s Preset Speed: 240°/s; Configurable, from 0.1°/s to 120°/s Preset Speed: 200°/s	Configurable, from 0.1°/s to 160°/s Preset Speed: 240°/s; Configurable, from 0.1°/s to 120°/s Preset Speed: 200°/s	Pan Manual Speed: 0.1°-250°/s, Pan Preset Speed: 300°/s Tilt Manual Speed: 0.1°-150°/s, Tilt Preset Speed: 200°/s	Pan Manual Speed: 0.1°-250°/s, Pan Preset Speed: 300°/s Tilt Manual Speed: 0.1°-150°/s, Tilt Preset Speed: 200°/s
Working Temperature	-30°C ~ 65°C (-22°F ~ 149°F)	-30°C to 65°C (-22°F to 149°F)	-30°C to 65°C (-22°F to 149°F)	-AE: -30°C to 65°C (-22°F to 149°F) -AE3: -10°C to 50°C (14°F to 122°F)	-AE: -30°C to 65°C (-22°F to 149°F) -AE3: -10°C to 50°C (14°F to 122°F)
Humidity	90% or less	90% or less	90% or less	90% or less	90% or less
Mini SD Memory Card	Support up to 128GB Micro SD/SDHC/SDXC card	Support up to 128GB Micro SD/SDHC/SDXC card	Support up to 128GB Micro SD/SDHC/SDXC card	Support up to 128GB Micro SD/SDHC/SDXC card	Support up to 128GB Micro SD/SDHC/SDXC card
Audio I/O	1-ch audio in/1-ch audio out	1-ch audio in/1-ch audio out	1-ch audio in/1-ch audio out	1-ch audio in/1-ch audio out	1-ch audio in/1-ch audio out
Alarm I/O	2-ch alarm in/1-ch alarm out	2-ch alarm in/1-ch alarm out	2-ch alarm in/1-ch alarm out	2-ch alarm in/1-ch alarm out	2-ch alarm in/1-ch alarm out
Power	High-PoE&24 VAC, Max.40W	High-PoE&24 VAC, Max.40W	High-PoE&24 VAC, Max.40W	AC 24V and PoE (802.3at, class4) Max.: 18W	AC 24V and PoE (802.3at, class4) Max.: 18W

	DS-2DE5220W	DS-2DE5330W
Model		
Image Sensor	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS
Max. Image Resolution	1920 × 1080	2048 × 1536
Image Compression	H.265+/H.265/H.264+/H.264/MJPEG	H.265+/H.265/H.264+/H.264/MJPEG
Focal Length	4.7-94mm, 20x	4.3 to 129mm, 30× Optical
Angle of View	61.4-2.9 degree (Wide-Tele)	57.4° to 2.8° (wide-tele)
Min. Illumination	F1.6, AGC On: Color: 0.05 lux, B/W : 0.01 lux	Color: 0.05 Lux @ (F1.6, AGC ON), B/W: 0.01Lux @ (F1.6, AGC ON)
WDR	Support	Support
IR Distance	--	--
VCA	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection	Support Face detection, Intrusion detection, Line crossing detection, Audio exception detection, Region entrance detection, Region exiting detection
Frame rate	Main stream: 50Hz: 25fps (1920 × 1080, 1280×960, 1280×720), 50fps (1280×960, 1280×720); 60Hz: 30fps(1920 × 1080, 1280×960, 1280×720), 60fps (1280×960, 1280×720)	Main stream: 50Hz: 25fps (2048×1536, 1920 × 1080, 1280×960, 1280×720), 50fps (1280×960, 1280×720); 60Hz: 30fps(2048×1536, 1920 × 1080, 1280×960, 1280×720), 60fps (1280×960, 1280×720)
Multi-Stream	Three	Three
Protection Level	IP66	IP66
Pan/tilt range	Pan: 360° endless; Tilt: -5°-90°(Auto Flip)	Pan: 360° endless; Tilt: -5°-90°(Auto Flip)
Pan/tilt Speed	Pan Manual Speed: 0.1°-250°/s, Pan Preset Speed: 300°/s Tilt Manual Speed: 0.1°-150°/s, Tilt Preset Speed: 200°/s	Pan Manual Speed: 0.1°-250°/s, Pan Preset Speed: 300°/s Tilt Manual Speed: 0.1°-150°/s, Tilt Preset Speed: 200°/s
Working Temperature	-AE: -30°C to 65°C (-22°F to 149°F) -AE3: -10°C to 50°C (14°F to 122°F)	-AE: -30°C to 65°C (-22°F to 149°F) -AE3: -10°C to 50°C (14°F to 122°F)
Humidity	90% or less	90% or less
Mini SD Memory Card	Support up to 128GB Micro SD/SDHC/SDXC card	Support up to 128GB Micro SD/SDHC/SDXC card
Audio I/O	1-ch audio in/1-ch audio out	1-ch audio in/1-ch audio out
Alarm I/O	2-ch alarm in/1-ch alarm out	2-ch alarm in/1-ch alarm out
Power	AC 24V and PoE (802.3at, class4) Max.: 18W	AC 24V and PoE (802.3at, class4) Max.: 18W

NETWORK VIDEO RECORDER



NVR EasyIP3.0 Series

Model	DS-7732NI-K4(/16P)	DS-7716NI-K4(/16P)	DS-7616NI-K2(/16P)	DS-7608NI-K2(/8P)	DS-7604NI-K1(/4P)
					
hardware platform	ARM	ARM	ARM	ARM	ARM
channel	32	16	16	8	4
Decoding format	H.265+/H.264+/H.264	H.265+/H.264+/H.264	H.265+/H.264+/H.264	H.265+/H.264+/H.264	H.265+/H.264+/H.264
Incoming/outgoing bandwidth	256Mbps/160Mbps	160Mbps/160Mbps	256Mbps/160Mbps	160Mbps/160Mbps	40Mbps/ 80Mbps
Decoding Capability	2-ch @ 4K, or 8-ch @ 1080p	4-ch @ 1080p			
Recording Resolution	Up to 8MP	Up to 8MP	Up to 8MP	Up to 8MP	Up to 8 MP
Display	1 × HDMI, 1 × VGA	1 x HDMI, 1 x VGA			
LCD	6TB × 4	6TB × 4	6TB × 2	6TB × 2	---
Storage capacity	---	---	---	---	6TB x 1
eSATA/Mini SAS	---	---	---	---	---
RAID type	---	---	---	---	---
Audio output	1-ch, RCA (Linear, 1 KΩ)				
Alarm input/output	16/4	16/4	4/1	4/1	---
Network interface	2 RJ45 10/100/1000m or 1 RJ45 10/100/1000m + 16 RJ45 10/100m(/16P model)	2 RJ45 10/100/1000m or 1 RJ45 10/100/1000m + 16 RJ45 10/100m(/16P model)	1 RJ45 10/100/1000m + 16 RJ45 10/100m(/16P model)	1 RJ45 10/100/1000m + 8 RJ45 10/100m(/8P model)	1 RJ45 10/100m + 4 RJ45 100m(/4P model)
PoE port	16 with /16P model	16 with /16P model	16 with /16P model	8 with /8P model	4 with /4P model
USB port	2 × USB 2.0, 1 × USB 3.0	2 × USB 2.0, 1 × USB 3.0	1 × USB 2.0, 1 × USB 3.0	1 × USB 2.0, 1 × USB 3.0	1 × USB 2.0, 1 × USB 3.0
smart function	Intrusion,Line crossing,Unattended Baggage,Object removal,Region exiting/entrance,People gathering,Fast moving,Parking,Loitering				
Power consumption(without HDD)	≤ 20W(without enabling PoE)	≤ 20W(without enabling PoE)	≤ 15W(without enabling PoE)	≤ 15W(without enabling PoE)	≤ 10W(without enabling PoE)
	Entry 4K NVR,easy to install with PoE model	Entry 4K NVR,easy to install with PoE model	Entry 4K NVR,easy to install with PoE model	Entry 4K NVR,easy to install with PoE model	Entry 4K NVR,easy to install with PoE model

Stable Transmission by Hikvision Cables



- CAT. 5e and 6
- UTP / Indoor PVC / 23(24)AWG
- Full 305m
- UL Certified
- OFC / 0.565(0.5)mm
- CM Fire Resistance

Easy PoE Installation



- Long Transmission Distance(≥ 25 m)
- Hi PoE Power Supply (IEEE 802.3af/at)
- 4KV Surge Protection
- VIP Port Optimized

Accessories

												
	20xx Series	2Tx Series	4Bxx Series			DS-1280ZJ-XS DS-1280ZJ-S	DS-1275ZJ-SUS	DS-1276ZJ-SUS				
	Description					Junction box	Vertical pole mount		Corner mount			
Dome camera												
	21xx Series	DS-1259ZJ	DS-1271ZJ-110	DS-1272ZJ-110	DS-1272ZJ-110B	DS-1275ZJ-SUS	DS-1276ZJ-SUS	DS-1280ZJ-DM18	DS-1258ZJ	DS-1253ZJ-M	DS-1250ZJ	
	Description		Inclined ceiling mount	Pendant mount	Wall mount	Wall mount	Vertical pole mount	Corner mount	Junction box	Wall mount	Rain shade	Rain shade
												
	23xx Series	DS-1273ZJ-130-TRL		DS-1275ZJ-SUS		DS-1276ZJ-SUS		DS-1280ZJ-DM8	DS-1281ZJ-M		DS-1271ZJ-130-TRL	
	Description		Wall mount		Vertical pole mount		Corner mount		Junction box		Inclined ceiling mount	
												
29xx Series	DS-1294ZJ			DS-1281ZJ-DM27			DS-1297ZJ		DS-1299ZJ			
Description		Wall mount			Inclined ceiling mount			Pendant mount (extendable)		Pendant Mount		
PTZ Dome camera												
	DE5xxxW Series		DE5xxxIW Series		DE7xxxIW Series		DF5xxxX Series		DF6xxxX Series		DF8xxxIX Series	
												
	DS-1661ZJ	DS-1662ZJ	DS-1663ZJ	DS-1660ZJ	DS-1604ZJ	DS-1604ZJ-pole	DS-1604ZJ-corner	DS-1604ZJ-box	DS-1604ZJ-BOX-POLE	DS-1604ZJ-BOX-CORNER	DS-1619ZJ	DS-1667ZJ
Pendant mount		Pendant mount	Ceiling mount	Parapet wall mount	Wall mount	Vertical pole mount	Corner mount	Wall mount with junction box	Vertical Pole Mount with junction box	Wall Mount with junction box	Gooseneck mount	Extendable pole for Pendant mount

Accessories

PT11							
	DS-2DE4Axxx DS-2DE44204IW-DE DS-2DE4A220IW-DE DS-2DE4A320IW-DE	DS-1605ZJ Wall Mount Bracket	DS-1671ZJ-SD11 In-ceiling Mount Bracket	DS-1280ZJ-SD11 Junction Box	DS-1691ZJ-L Pendant mount	DS-1691ZJ-M Pendant mount	DS-1691ZJ Pendant mount
	Description	Hik white Aluminum alloy 183.5×120×228.6 mm, 1120g	Hik white Aluminum alloy ∅233×85mm	Hik white Aluminum alloy ∅158×40mm	Hik white Steel 124×84×1000mm 2175g	Hik white Steel 124×84×500mm 1175g	Hik white Aluminum alloy 84×124×335mm 980g
Positioning System Lite							
	DS-2DY5223IW-AE	DS-1693ZJ-S Wall mount					
	Description	Hik white steel 167×182×309mm, 2330g Outdoor					
PT Bullet Camera							
	DS-2DY3xxxIW-DE	DS-1280ZJ-M(SPTZ) Junction Box	DS-1281ZJ-M(SPTZ) Inclined ceiling mount	DS-1275ZJ(SPTZ) Pole mount			
	Description	"Hik white steel 157 x 53.4 x 184mm, 621g" Outdoor	"Hik white steel 157 x 61.8 x 165.7mm, 586g" Outdoor	"Hik white steel 250 x 127 x 140mm" Outdoor			


Accessories

Lens						
Appearance						
Model	HV3816P-8MPIR	HV1140P-8MPIR	HV0733D-6MP	TV2713D-5MP	HF3417D-12MPIR	
Description	<ul style="list-style-type: none"> Image size: 1/1.8" Aperture: F1.4 Focus length: 3.8-16mm Mount: CS Resolution: 8MP 	<ul style="list-style-type: none"> Image size: 1/1.8" Aperture: F1.4 Focus length: 11-40mm Mount: CS Resolution: 8MP 	<ul style="list-style-type: none"> Image size: 1/1.8" Aperture: F0.95 Focus length: 7-33mm Mount: CS Resolution: 6MP 	<ul style="list-style-type: none"> Image size: 1/2.7" Aperture: F0.95 Focus length: 2.7-13mm Mount: CS Resolution: 5MP 	<ul style="list-style-type: none"> Image size: 1/1.7" Aperture: F1.7 Focus length: 3.4mm Mount: CS Resolution: 12MP 	
Pickup			Mirco SD Card			
Appearance						
Model	DS-2FP4021-B	DS-2FP2020	DS-UTF32/64G-H1	DS-UTF16/32/64/128G-L1		
Description	<ul style="list-style-type: none"> Hi-fidelity Pickup Input DC 12V Scope: up to 60m2 Sensitive: -41dB External Size: 64mm×20mm(diameter×height) 	<ul style="list-style-type: none"> Fidelity Pickup Input DC 12V Scope: up to 70m2 Sensitive: -32dB External Size: Ø78mm×28mm 	<ul style="list-style-type: none"> MLC Class10(reading25MB/s, writing: 20MB/s) Storage capacity: 32/64G 	<ul style="list-style-type: none"> TLC Class10(reading25MB/s, writing: 20MB/s) Storage capacity: 16/32/64/128G 		
PoE Switch					Tool	
Appearance						
Model	DS-3E0326P-E	DS-3E1326P-E	DS-3D2228P	IPC-4300H		
Description	<ul style="list-style-type: none"> Unmanaged L2 PoE Switch 24×10/100Mbps PoE ports, each port support 802.3af/802.3at self-adaption 2×1000M combo port 370Watts PoE budget 250m transmission 4 kV surge protection Plug-and-play installation 	<ul style="list-style-type: none"> Managed L2 PoE Switch 24×10/100Mbps PoE ports, each port support 802.3af/802.3at self-adaption 2×1000M combo port 370Watts PoE budget 250m transmission 4 kV surge protection Web-managed: VLAN, Port Mirroring, SNMP, etc. 	<ul style="list-style-type: none"> Full Managed L2 PoE Switch 24×10/100Mbps PoE ports, each port support802.3af/802.3at self-adaption 4×Gigabit combo ports 370Watts PoE budget QoS and flow control VLAN support and tagging Spanning Tree Protocol(STP) Network Management: SNMP, Telnet, RMON, CLI Network Security: IEEE 802.1x, IP ACL, MAC ACL, VLAN,ACL, and static/dynamic ARP prevention 	<ul style="list-style-type: none"> Integrated Mount Tester For IPC, HDTVI, Analog camera TDR,record,playback,etc 		
Keyboard			Network Cable			
Appearance				Appearance		
Model	DS-1100KI	DS-1200KI	DS-1005KI	Model	DS-1LN6-UU	DS-1LN5E-S
Description	<ul style="list-style-type: none"> 7" TFT touch screen with 800×480 resolution Live view and video playback Video wall control 4-axis joystick Macro command operation Up to 255 analog domes by RS-485 connection Compatible with Hikvision IP cameras, DVR/NVR,decoder, matrix 	<ul style="list-style-type: none"> 128x64 LED dot matrix screen PTZ and TV wall control 4-axis joystick System upgrade and import / export of configuration files by USB-flash disk Network access and configuration by Web browser support 	<ul style="list-style-type: none"> USB HID protocol Power supply and communication by USB port directly PTZ control: set and call the preset, patrol and pattern DVR/NVR menu control Compatible with client software and platform software 	Description	<ul style="list-style-type: none"> HIKVISION E484059-Z (UL) CM 4PR 23AWG 75 C U/UTP CAT6 VERIFIED TO ANSI/TIA-568-C.1 PVC ***** mm/dd/yyyy 	<ul style="list-style-type: none"> HIKVISION E484059-Z CM (UL) 4PR 24AWG 75 C U/UTP CAT5E VERIFIED TO ANSI/TIA-568-C.2 PVC ***** mm/dd/yyyy



SIMPLE AND POWERFUL
THE EASIER JOURNEY TO BETTER SECURITY
EasyIP 3.0 SOLUTION

Distributed by



HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Turkey
T +90-216-521-70-70
sales.tr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Follow us on social media to get the latest product and solution information

