

DATA SHEET

Waterproof fixtures / TAKAT

Ref. TKT60-2040




-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-

Downloads



20W 60cm 4000K waterproof fixture

MEASURES

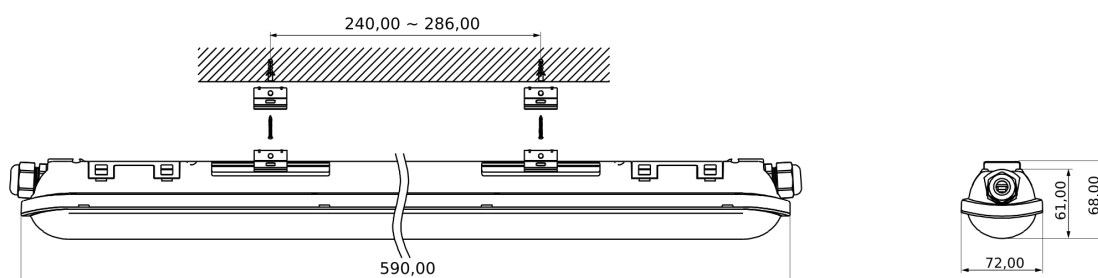


Electrical data

Lighting technology:	LED
Power factor:	>0,50
Frequency:	50/60 Hz
Insulation class:	Class I

Consumed power:	20 W
Voltage:	220 - 240 V
Input current:	0,17 A

Photometric data

Color temperature:	4000K
Chromatic reproduction index:	>80
Flicker:	Flicker free
MacAdam grouping:	3
Color lamp/application:	Neutral white
Real Luminous lux:	2600 lm
Rated luminous flux:	3000 lm
Luminous efficiency:	130 lm/W
Nominal luminous efficiency:	150 lm/W
Optical Symmetry:	Symmetric
Opening angle:	120 °
Number of LEDs:	66
LED type:	SMD2835
Life time:	50000 h L70B50
Switchovers n°:	25000

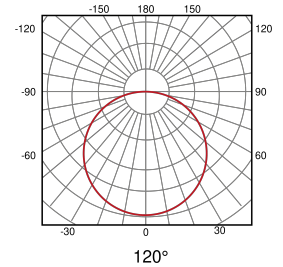

Physical data

Color:	RAL7038	Finish:	Grey
Material:	Polycarbonate	Diffuser material:	Polycarbonate
Clip material:	Acero inoxidable	Operating temperature:	-20 ~ 40 °C
Degree of IP protection:	IP65	Degree of IK protection:	IK08

Dimensional data

Format:	1x600	Outside length:	600 mm
Outside width:	72 mm	High/Depth:	61 mm
Weight:	580 gr	Linkable:	Yes

Packaging (Unidad)

Packaging	Minimum	Maximum	Divisible	Length (m)	Width (m)	Depth (m)	Volume (m³)	Weight (Kg)
BOX	1	1	Not	0.632	0.075	0.065	0.003081	0.61
OUTERBOX	20	20	Yes	0.653	0.33	0.36	0.0775764	15.1

Regulatory compliance

CE marking:	Yes	CMIM marking:	Yes
EMC marking:	Yes	RoHS compliant:	Yes
Selective collection:	Yes		

Energy efficiency

Kind of product:

Containing product